1139 Medium Duty General Purposes Caster Series



WCPD (White) Wheel Diameter × Wheel Width 75 x 31mm

EAN

YJ-11390300444083

Casters with Total Brakes and With locking system. Top Plate with Riveted, Stamping Fork —75 x 45 mm (3" x 1-3/4") Bolt Hole Spacing.


Zine-Plated, Top Plate (4T) Mounting Type system.

Polypropylene Wheel Center and Wheel Tread.

White, Bearing—Ball Bearings.

Wheel tread: PP polypropylene Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 3 "

Wheel Width 1-1/4 "
Wheel Bearing Wheels With Ball Bearings

Plate Size 3-13/16 " x 2-9/16 "

Bolt Hole Spacing 3 " x 1-13/16 "

Plate Hole 1/2 " x 23/64 "

Offset 1-1/2 "
Swivel Interference 9-1/8 "
Overall Height 4-3/16 "
Swivel Radius 4-9/16 "
Hardness Of Tread 72±5° Shore D

Load Capacity (Dynamic) 220lbs

Load Capacity (Static) 331lbs

Temperature 4°F to +140°F

Fork Type Swivel Caster With Total Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.7lbs

Standard ISO22883

Advantages at a glance

Rolling Resistance


• • • • •


Operating Noise

 \bullet \bullet \circ \circ


Floor Surface Preservation $\bullet \bullet \circ \circ$

Dimensions





Mounting

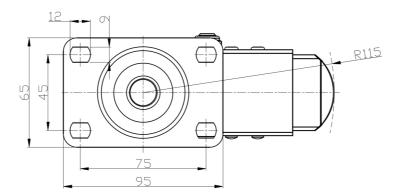

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.