# 1139-1 Series — Medium Duty General Purposes Caster (American Style)

Dersheng Casters Keep Rolling

PPR (Pearlescent dark gray) Wheel Diameter × Wheel Width 75 x 31mm


EAN

YJ-11390300452083

Swivel Caster with Riveted Fork and Stamping Fork—75 x 45 mm (3" x 1-3/4") Bolt Hole Spacing Zine-Plated, Mounting Type - Top Plate Polypropylene Wheel Center and Wheel Tread Pearl-gray finish, Bearing—Ball Bearings.

Tread:Polypropylene
Wheel Center:Polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

### Technical Data

● Imperial ○ Metric

Wheel Diameter 3 "

Wheel Width 1-1/4 "

Wheel Bearing Wheels With Ball Bearings

Plate Size 3-11/16 " x 2-7/16 "

Bolt Hole Spacing 2-15/16 " x 1-13/16 "

Plate Hole 9/16 " x 3/8 "

Offset 1-3/16 "

Swivel Interference 5-7/16 "

Overall Height 4-1/4 "

Swivel Radius 2-11/16 "

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 198lbs

Load Capacity (Static) 298lbs

Temperature -4°F to +140°F

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Standard

Weight 1.3lbs

ISO22883

Weight 1.3lbs

## Advantages at a glance

Rolling Resistance


 $\bullet$   $\bullet$   $\bullet$   $\circ$ 

Operating Noise


• • • • 0

Floor Surface Preservation • • • • •

#### **Dimensions**

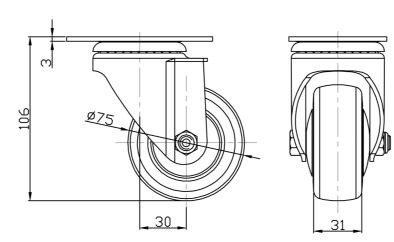

## Mounting

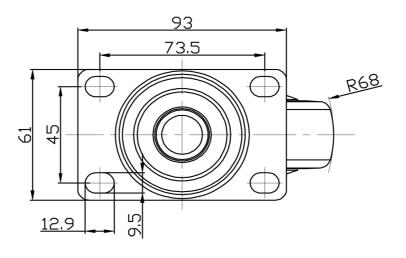

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.