

1139-1 Series — Medium Duty General Purposes Caster  
(American Style)



Resolute (Pearlescent dark gray) Wheel Diameter x Wheel Width 75 x 31mm


EAN

YJ-11390300454083

Casters with Total Brakes and With locking system. Top Plate with Riveted, Fork and 75 x 45 mm (3" x 1-3/4") Bolt Hole Spacing.  
Zine-Plated, Mounting Type - Top Plate.  
Polypropylene Wheel Center and Wheel Tread.  
Pearl-finish dark gray. Bearings with Ball Bearings.

Tread:Polypropylene  
Wheel Center:Polypropylene

Drawings are for reference only and may differ from the product

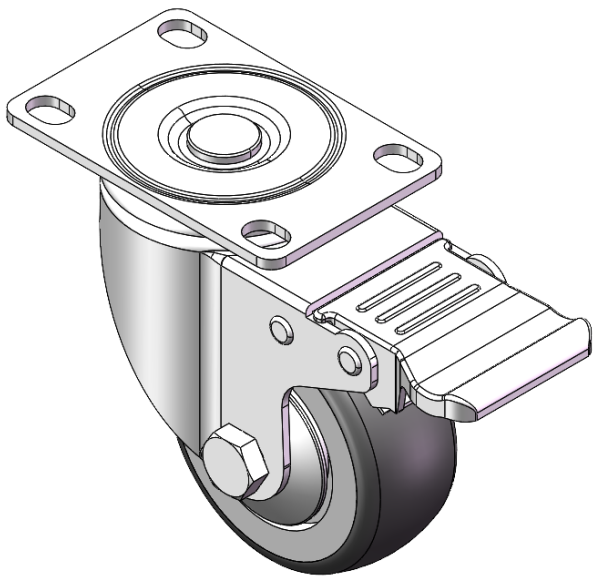

Picture may differ from original product


Technical Data

|                                                                        |                                |
|------------------------------------------------------------------------|--------------------------------|
| <input checked="" type="radio"/> Imperial <input type="radio"/> Metric |                                |
| Wheel Diameter                                                         | 3 "                            |
| Wheel Width                                                            | 1-1/4 "                        |
| Wheel Bearing                                                          | Wheels With Ball Bearings      |
| Plate Size                                                             | 3-11/16 " x 2-7/16 "           |
| Bolt Hole Spacing                                                      | 2-15/16 " x 1-13/16 "          |
| Plate Hole                                                             | 9/16 " x 3/8 "                 |
| Offset                                                                 | 1-3/16 "                       |
| Swivel Interference                                                    | 8-1/2 "                        |
| Overall Height                                                         | 4-1/4 "                        |
| Swivel Radius                                                          | 4-1/4 "                        |
| Hardness Of Tread                                                      | 72±5° Shore A                  |
| Load Capacity (Dynamic)                                                | 198lbs                         |
| Load Capacity (Static)                                                 | 298lbs                         |
| Temperature                                                            | -4°F to +140°F                 |
| Fork Type                                                              | Swivel Caster With Total Brake |
| Stainless                                                              | N/A                            |
| Electrical Conductivity                                                | N/A                            |
| Anti-Static                                                            | N/A                            |
| Weight                                                                 | 1.5lbs                         |
| Standard                                                               | ISO22883                       |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ● ● ● |
| Floor Surface Preservation | ● ● ● ● ● |

Dimensions

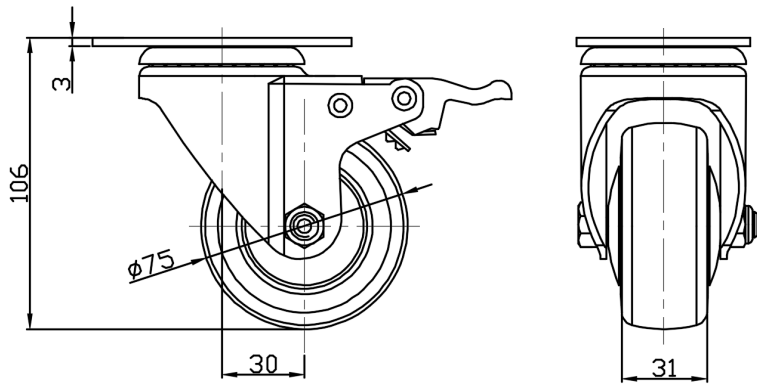

Mounting

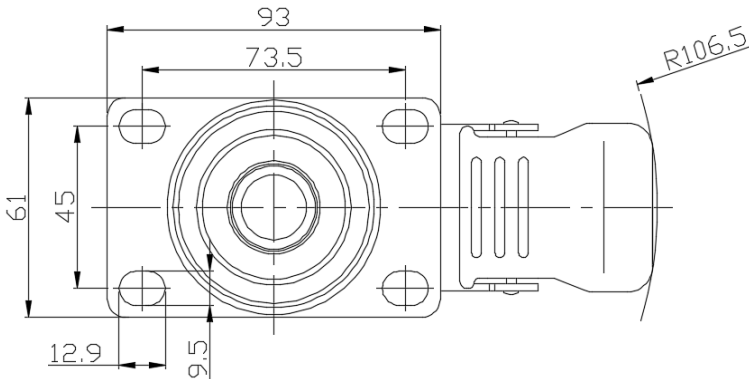

\* For any deviation between metric and imperial spec, please refer to the metric spec.