# 1139 Medium Duty General Purposes Caster Series

Dersheng Casters Keep Rolling

W Resolute (Pearlescent dark gray) Wheel Diameter × Wheel Width 75 x 31mm

EAN


#### YJ-11390300455013

Swivel Caster, thread-Riveted Stamping Fork—M12-P1.75
Zine-Plated, Mounting Type - Threaded Stem
Reinforced impact-resistant polypropylene core, High-Quality Reinforced Polypropylene
Rubber (TPR) Wheel Tread
Pearl-gray finish, Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

#### Technical Data

● Metric ○ Imperial

Wheel Diameter 75mm
Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

Threaded Stem M12-P1.75

Threaded Size 25mm

Offset 38mm

Swivel Interference 152mm

Overall Height 105.5mm

Swivel Radius 76mm

Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic) 110kgs

Load Capacity (Static) 165kgs

Temperature -20°C to +60°C

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity

Anti-Static

N/A

Weight

0.51kgs

Standard

ISO22883

## Advantages at a glance

Rolling Resistance


• • • • •

Operating Noise


• • • • •

Floor Surface Preservation • • • • •

### **Dimensions**

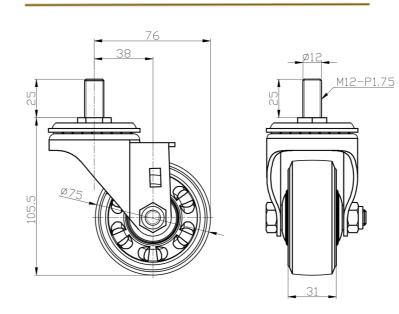

Mounting

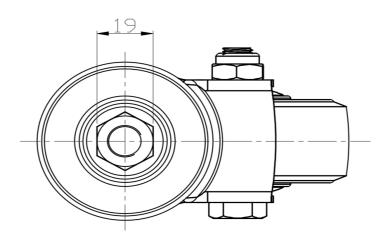

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.