1139 Medium Duty General Purposes Caster Series

Dersheng Casters Keep Rolling

W Resolute (Pearlescent dark gray) Wheel Diameter × Wheel Width 75 x 31mm

EAN

YJ-11390300456113

Casters with Total Brakes and a With locking system. Threaded Stem Riveted Pressed Fork—M12-P1.75.


Zine-Plated, Mounting Type - Threaded Stem.
Reinforced, impact-resistant polypropylene Wheel Center with High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread.

Pearl-gray finish. Bearings—Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

3 " Wheel Diameter 1-1/4 " Wheel Width

Wheel Bearing Wheels With Ball Bearings

M12-P1.75 **Threaded Stem** Threaded Size Offset 1-1/2 " 9-1/8 " Swivel Interference Overall Height 4-3/16 " 4-9/16" **Swivel Radius** Hardness Of Tread 72±5° Shore A

243lbs Load Capacity (Dynamic) Load Capacity (Static) 364lbs

Temperature -4°F to +140°F

Swivel Caster With Total Brake Fork Type

Stainless N/A **Electrical Conductivity** N/A Anti-Static N/A Weight 1.4lbs ISO22883 Standard


Advantages at a glance

Rolling Resistance


Operating Noise

Floor Surface Preservation • • • • •

Dimensions

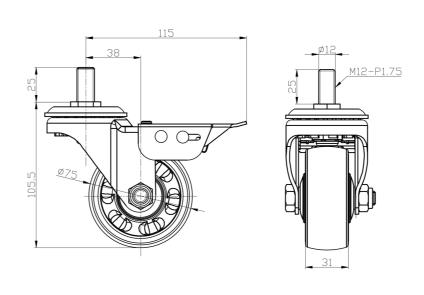

Mounting

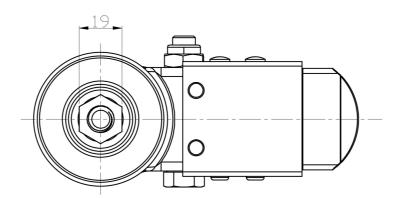

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.