1139 Medium Duty General Purposes Caster Series

Dersheng Casters Keep Rolling

W Resolute (Pearlescent dark gray) Wheel Diameter × Wheel Width 75 x 31mm

EAN


YJ-11390300456133

Casters with Side Brakes and With locking system. Threaded Stem Riveted Pressed Fork 1/2"-12" Zine-Plated, Mounting Type - Threaded Stem Reinforced impact-resistant polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread Pearl-finish dark gray, Bearing – Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 75mm
Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

Threaded Stem 1/2 "-12

Threaded Size 25mm

Offset 38mm

Swivel Interference 160mm

Overall Height 105.5mm

Swivel Radius 80mm

Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic) 110kgs
Load Capacity (Static) 165kgs

Temperature -20°C to +60°C

Fork Type Swivel Caster With Side Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.60kgs

Standard ISO22883

Advantages at a glance

Rolling Resistance


• • • • •

Operating Noise


..

Floor Surface Preservation • • • • •

Dimensions

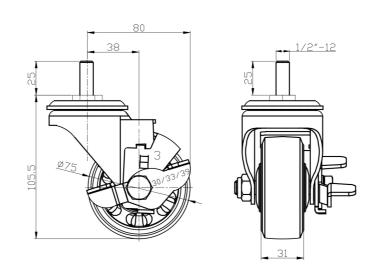

Mounting

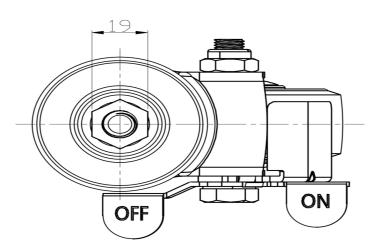

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.