

1139 Medium Duty General Purposes Caster Series



QPU (Brown flat) Wheel Diameter x Wheel Width 75 × 32mm


EAN

YJ-11390300532913

Swivel Caster, Top Plate Riveted Stamping Fork - high-grade hole Surface Zine-Plated, Top Plate type (4T) installation device Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread Brown, Bearing - Ball Bearing.

Wheel tread: Made of high quality polyurethane
Wheel Center: cast iron core

Drawings are for reference only and may differ from the product

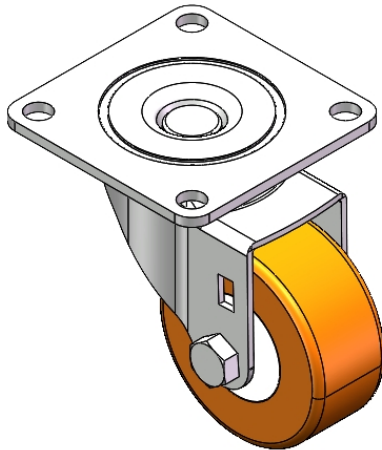

Picture may differ from original product


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter	75mm
Wheel Width	32mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	90 x 90mm
Bolt Hole Spacing	71 x 71mm
Plate Hole	10.5mm
Offset	38mm
Swivel Interference	156mm
Overall Height	105.5mm
Swivel Radius	78mm
Hardness Of Tread	92±5° Shore A
Load Capacity (Dynamic)	160kgs
Load Capacity (Static)	240kgs
Temperature	-20°C to +70°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	1.14kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ● ●
Floor Surface Preservation	● ● ● ● ●

Dimensions

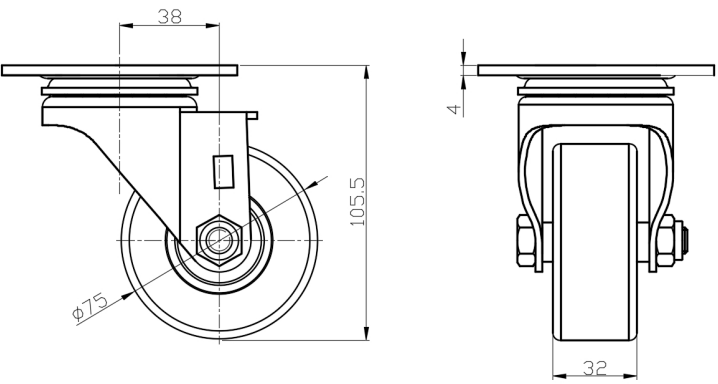

Mounting

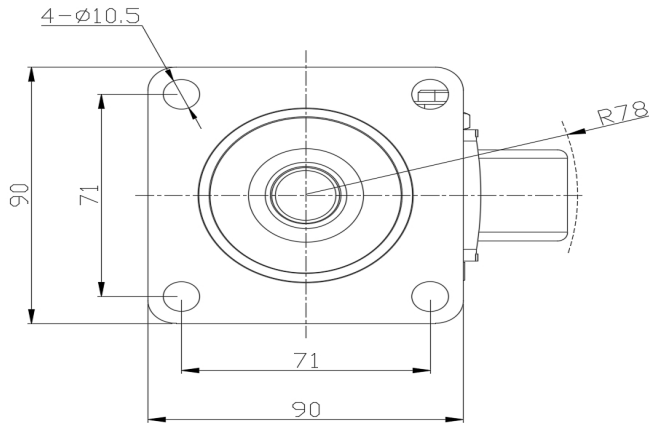

* For any deviation between metric and imperial spec, please refer to the metric spec.