



1139 Medium Duty General Purposes Caster Series

QPU (Brown flat) Wheel Diameter x Wheel Width 75 × 32mm


EAN

YJ-11390300532913

Swivel Caster, Top Plate Riveted Stamping Fork - high-grade hole Surface Zine-Plated, Top Plate type (4T) installation device Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread Brown, Bearing - Ball Bearing.

Wheel tread: Made of high quality polyurethane
Wheel Center: cast iron core

Drawings are for reference only and may differ from the product

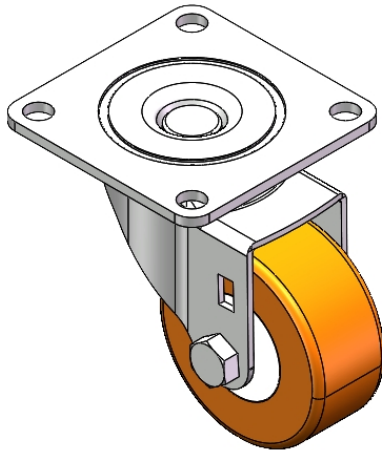

Picture may differ from original product


Technical Data

☒ Imperial ☐ Metric	
Wheel Diameter	3 "
Wheel Width	1-5/16 "
Wheel Bearing	Wheels With Ball Bearings
Plate Size	3-9/16 " x 3-9/16 "
Bolt Hole Spacing	
Plate Hole	3/8 "
Offset	1-1/2 "
Swivel Interference	6-3/16 "
Overall Height	4-3/16 "
Swivel Radius	3-1/8 "
Hardness Of Tread	92±5° Shore A
Load Capacity (Dynamic)	353lbs
Load Capacity (Static)	529lbs
Temperature	-4°F to +158°F
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	2.5lbs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ● ●
Floor Surface Preservation	● ● ● ● ●

Dimensions

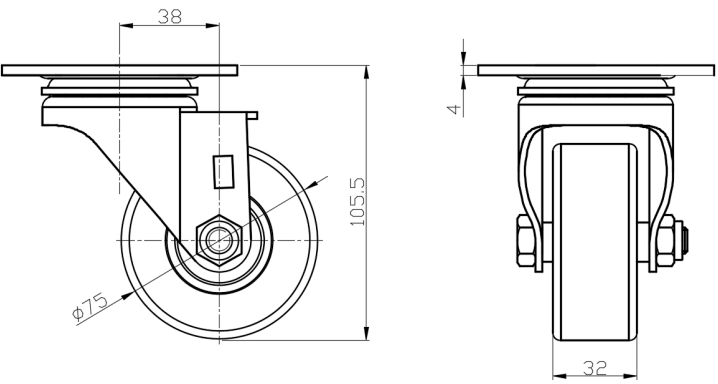

Mounting

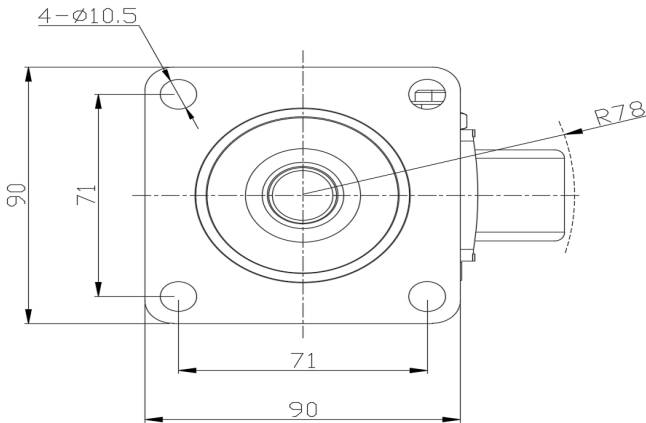

* For any deviation between metric and imperial spec, please refer to the metric spec.