1139 Medium Duty General Purposes Caster Series

Dersheng Casters Keep Rolling

QPU (Brown flat) Wheel Diameter x Wheel Width 75 × 32mm

EAN

YJ-11390300536013

Casters with Total Brakes and a With locking system. Threaded Stem Riveted Pressed Fork—M12-P1.75.

Zine-Plated, Mounting Type - Threaded Stem.


Cast Iron core, High Quality Polyurethane Wheel Tread.

Brown color, Ball Bearings.

Wheel tread: Made of high-quality polyurethane

Wheel Center: cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

Fork Type

Standard

● Metric ○ Imperial

Wheel Diameter 75mm
Wheel Width 32mm

Wheel Bearing Wheels With Ball Bearings

Threaded Stem M12-P1.75

Threaded Size 25mm

Offset 38mm

Swivel Interference 230mm

Overall Height 105.5mm

Swivel Radius 115mm

Hardness Of Tread 92±5° Shore

Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 160kgs

Load Capacity (Static) 240kgs

Temperature -20°C to +70°C

Swivel Caster With Total Brake

ISO22883

StainlessN/AElectrical ConductivityN/AAnti-StaticN/AWeight1.07kgs

Advantages at a glance


Rolling Resistance

• • • •


Operating Noise

Floor Surface Preservation • • • • •

Dimensions

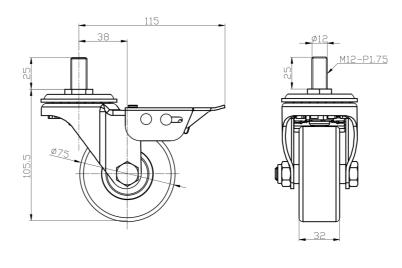

Mounting

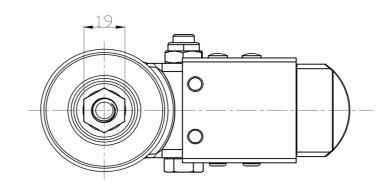

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.