1139 Medium Duty General Purposes Caster Series



WPPR (Pearl Gray) Wheel Diameter × Wheel Width 87.5 x 31mm

EAN


YJ-11390350262013

Swivel Caster, Top Plate Riveted Stamping Fork - 75 x 45 mm (3" x 1-3/4") Bolt Hole Spacing Surface Zine-Plated, Top Plate (4T) Mounting Type device Reinforced impact-resistant High-quality Impact Resistance Polypropylene Wheel Center, High-Quality Thermoplastic Rubber (TPR) Wheel Tread Pearl dark gray, Bearing - Ball Bearing.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

Wheel Width

● Imperial ○ Metric

Wheel Diameter 87.5mm 1-1/4 "

Wheel Bearing Wheels With Ball Bearings 3-13/16 " x 2-9/16 " Plate Size

Bolt Hole Spacing

1/2 " x 23/64 " Plate Hole 1-1/2 " Offset

6-1/2 " Swivel Interference 4-1/2 " Overall Height 3-5/16 " **Swivel Radius** Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 198lbs 298lbs Load Capacity (Static)

Temperature -4°F to +140°F Fork Type **Swivel Caster**

Stainless N/A **Electrical Conductivity** N/A N/A Anti-Static Weight 1.5lbs Standard ISO22883


Advantages at a glance

Rolling Resistance


Operating Noise

Floor Surface Preservation • • • • •

Dimensions

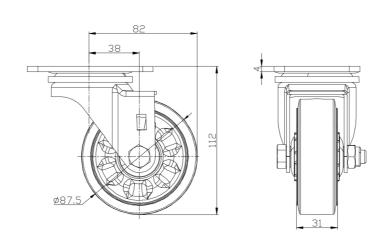

Mounting

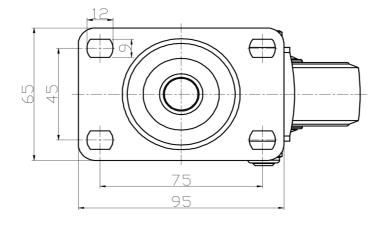

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.