# 1139 Medium Duty General Purposes Caster Series



Rubber Wheel Diameter × Wheel Width 100 x 30.5mm

EAN

YJ-11390400061014

Rigid castors, Stamping Fabricated Caster Fork - 75 x 45 mm (3" x 1-3/4") Bolt Hole Spacings Surface electroplating, Top Plate installation device Reinforced Polypropylene, High-Quality Resilient Rubber Wheel Tread Wheels—Anti-thread wheel cover

Wheel Tread: high quality elastic rubber Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product



Picture may differ from original product

### **Technical Data**

● Imperial ○ Metric

Wheel Diameter 4 "

Wheel Width 1-1/4 "

Wheel Bearing Wheel With Plain Bearing

Plate Size 3-11/16 " x 2-1/2 "

**Bolt Hole Spacing** 

Anti-Static

Plate Hole 1/2 " x 23/64 "

Overall Height 5-3/16 "

Hardness Of Tread 80±5° Shore A

Load Capacity (Dynamic) 176lbs

Load Capacity (Static) 265lbs

Temperature -4°F to +248°F

Fork Type Rigid Caster

Stainless N/A

Electrical Conductivity N/A

Weight 1.4lbs
Standard ISO22883

N/A

#### Advantages at a glance

Rolling Resistance


 $\bullet$   $\bullet$   $\circ$   $\circ$ 


**Operating Noise** 

• • • 0


Floor Surface Preservation  $\bullet \bullet \bullet \bullet \circ$ 

#### **Dimensions**





## Mounting

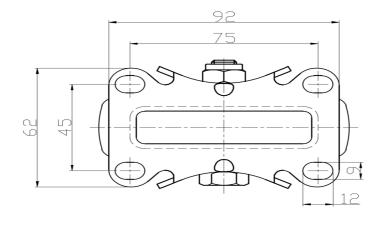

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.