Product Data Sheet

1139 Medium Duty General Purposes Caster Series

Dersheng Casters Keep Rolling

Rubber Wheel Diameter × Wheel Width 100 x 30.5mm

EAN

YJ-11390400065223

Swivel Caster, thread-Riveted Stamping Fork - 1/2"-13" Zine-Plated, expansion Mounting Type (\varnothing 21.6- \varnothing 24) Reinforced Polypropylene core, High-Quality Resilient Rubber Wheel Tread Bearing - Plain Bearing

Wheel surface: high-quality elastic rubber Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 100mm Wheel Width 30.5mm

Wheel Bearing Wheel With Plain Bearing

Expandable Stem 21.6 x 69mm Offset 38mm Swivel Interference 176mm Overall Height 127mm **Swivel Radius** 88mm

Hardness Of Tread 80±5° Shore A Load Capacity (Dynamic) 80kgs

Load Capacity (Static) 120kgs

Temperature -20°C to +120°C **Swivel Caster** Fork Type Stainless N/A

Electrical Conductivity N/A Anti-Static N/A 0.90kgs Weight ISO22883 Standard


Advantages at a glance

Operating Noise


Rolling Resistance

Floor Surface Preservation • • • • •

Dimensions



Mounting

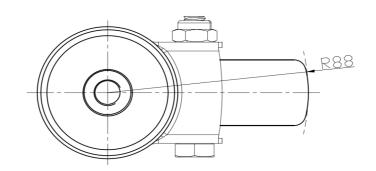

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.