

1139 Medium Duty General Purposes Caster Series



Rubber Wheel Diameter × Wheel Width 100 x 30.5mm


EAN

YJ-11390400066023

Side Brake Locking system. Thread-Riveted Fork —1/2"-13 Extended control lever surface, Mounting Type - Angle Iron Fitting (Ø34.5-Ø36) Reinforced Polypropylene, High-Quality Resilient Rubber Wheel Tread Wheels—Plain Bearing

Wheel Tread: high quality elastic rubber
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

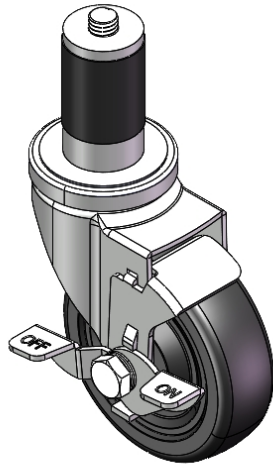

Picture may differ from original product


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter	100mm
Wheel Width	30.5mm
Wheel Bearing	Wheel With Plain Bearing
Expandable Stem	34.5 x 69mm
Offset	38mm
Swivel Interference	176mm
Overall Height	127mm
Swivel Radius	88mm
Hardness Of Tread	80±5° Shore A
Load Capacity (Dynamic)	80kgs
Load Capacity (Static)	120kgs
Temperature	-20°C to +120°C
Fork Type	Swivel Caster With Side Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.99kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ○

Dimensions

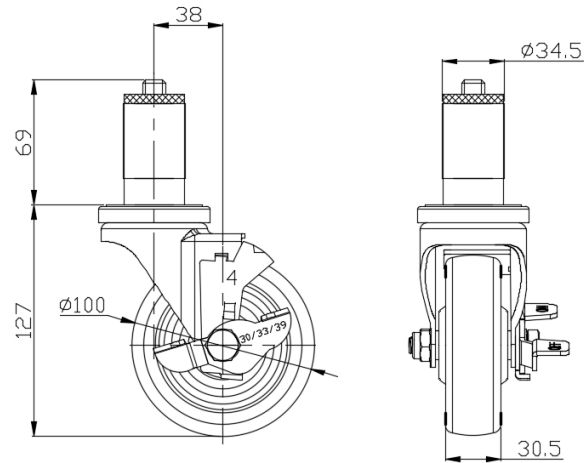

Mounting

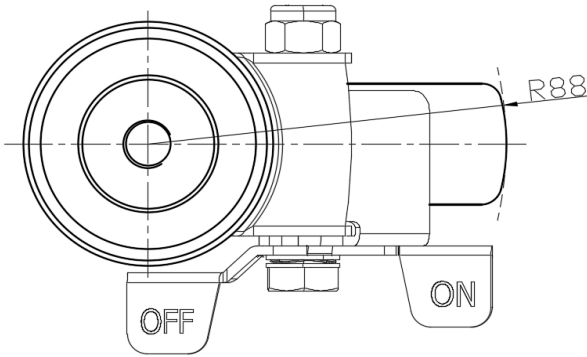

* For any deviation between metric and imperial spec, please refer to the metric spec.