# 1139 Medium Duty General Purposes Caster Series

Dersheng Casters Keep Rolling

PPR (Plain Bearing) (Pearlescent dark gray) Wheel Diameter × Wheel Width 100 x 31mm

EAN


YJ-11390400262043

Swivel castor, Fork Riveted Stamping Fork - premium hole Surface Zine-Plated, Top Plate (4T) Mounting Type Impact resistant High-quality Impact Resistance Polypropylene Wheel Center, High-Quality Thermoplastic Rubber (TPR) Wheel Tread Pearl grey, wheel - Plain Bearing.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

● Imperial ○ Metric

4 " Wheel Diameter

1-1/4 " Wheel Width

Wheel Bearing Wheel With Plain Bearing

3-13/16 " x 2-9/16 " Plate Size

3" x 1-13/16" Bolt Hole Spacing 1/2 " x 23/64 " Plate Hole

1-1/2 " Offset 7 '' Swivel Interference

5-3/16 "

Overall Height 3-1/2 " **Swivel Radius** 

Hardness Of Tread 82±5° Shore A

220lbs Load Capacity (Dynamic) Load Capacity (Static) 331lbs

Temperature -4°F to +140°F

Fork Type **Swivel Caster** 

ISO22883

Stainless N/A

**Electrical Conductivity** N/A

N/A Anti-Static

Weight 1.6lbs

Standard

Technical Data


### Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation • • • • •

#### **Dimensions**





## Mounting

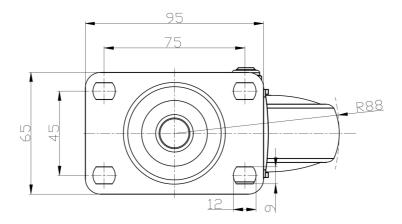

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.