

1139 Medium Duty General Purposes Caster Series



PPR (Pearlescent dark gray) Wheel Diameter × Wheel Width 100 x 31mm


EAN

YJ-11390400264053

Casters with side (wheel) brakes and With locking system. Top Plate Riveted and Fork – 75 x 45 mm (3" x 1-3/4") Bolt Hole Spacing.  
Zine-Plated, Top Plate (4T) Mounting Type system.  
High-Quality Impact-Resistant Polypropylene Wheel Center with High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread.  
Pearl-finish dark gray. Bearings – Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)  
Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

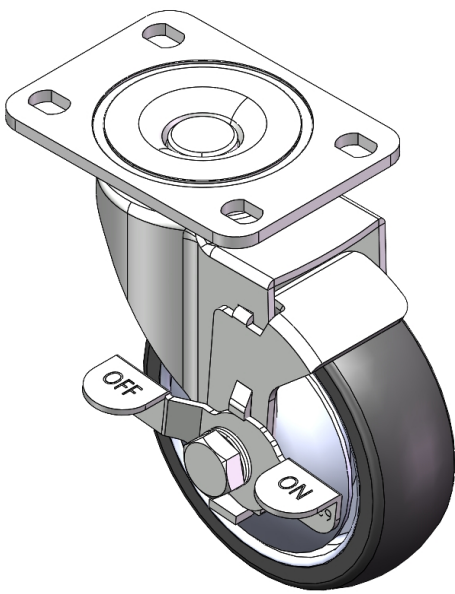

Picture may differ from original product


Technical Data

|                                                                        |                               |
|------------------------------------------------------------------------|-------------------------------|
| <input checked="" type="radio"/> Imperial <input type="radio"/> Metric |                               |
| Wheel Diameter                                                         | 4 "                           |
| Wheel Width                                                            | 1-1/4 "                       |
| Wheel Bearing                                                          | Wheels With Ball Bearings     |
| Plate Size                                                             | 3-13/16 " x 4-3/16 "          |
| Bolt Hole Spacing                                                      | 3 " x 1-13/16 "               |
| Plate Hole                                                             | 1/2 " x 23/64 "               |
| Offset                                                                 | 1-1/2 "                       |
| Swivel Interference                                                    | 7 "                           |
| Overall Height                                                         | 5-3/16 "                      |
| Swivel Radius                                                          | 3-1/2 "                       |
| Hardness Of Tread                                                      | 82±5° Shore A                 |
| Load Capacity (Dynamic)                                                | 220lbs                        |
| Load Capacity (Static)                                                 | 331lbs                        |
| Temperature                                                            | -4°F to +140°F                |
| Fork Type                                                              | Swivel Caster With Side Brake |
| Stainless                                                              | N/A                           |
| Electrical Conductivity                                                | N/A                           |
| Anti-Static                                                            | N/A                           |
| Weight                                                                 | 1.9lbs                        |
| Standard                                                               |                               |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ○ |
| Operating Noise            | ● ● ● ● ○ |
| Floor Surface Preservation | ● ● ● ● ● |

Dimensions

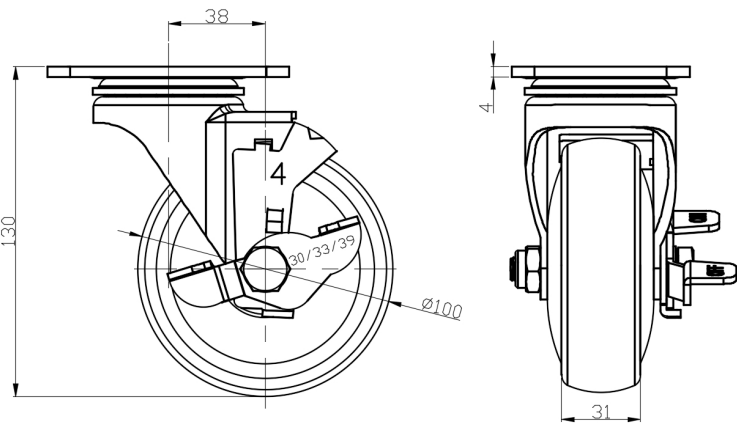

Mounting

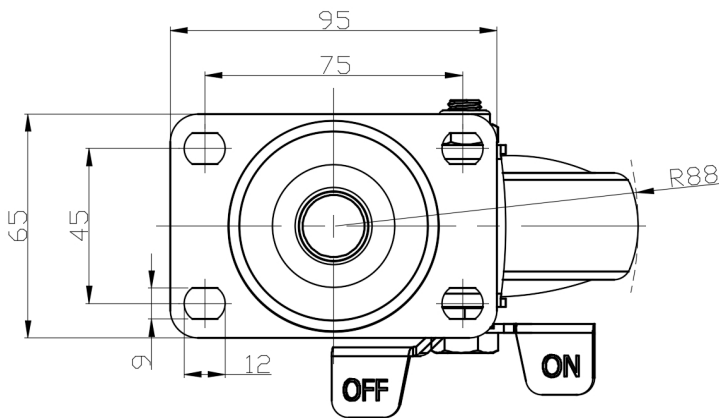

\* For any deviation between metric and imperial spec, please refer to the metric spec.