1139 Medium Duty General Purposes Caster Series

Dersheng Casters Keep Rolling

WCPD (Black) Wheel Diameter × Wheel Width 100 x 31mm


EAN

YJ-11390400442053

Swivel Caster, Top Plate Riveted and Stamping with 75 x 45 mm (3" x 1-3/4") Bolt Hole Spacing Zine-Plated, Top Plate (4T) Mounting Type Polypropylene Wheel Center and Wheel Tread Black, Bearing—Ball Bearings

Wheel tread: PP polypropylene Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 100mm
Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 95 x 65mm **Bolt Hole Spacing** 75 x 45mm Plate Hole 12 x 9mm Offset 38mm Swivel Interference 176mm Overall Height 130mm **Swivel Radius** 88mm Hardness Of Tread 72±5° Shore D

Load Capacity (Dynamic) 160kgs
Load Capacity (Static) 240kgs

Temperature -12°C to +60°C
Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.74kgs

Standard ISO22883

Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • • •

Dimensions

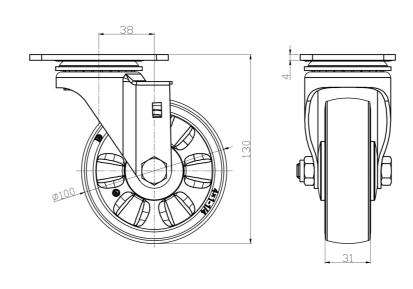

Mounting

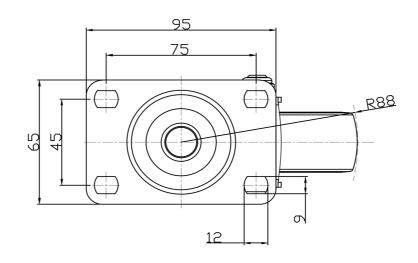

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.