1139 Medium Duty General Purposes Caster Series

Dersheng Casters Keep Rolling

W Resolute(Pearlescent dark gray) Wheel Diameter × Wheel Width 100 x 31mm

EAN


YJ-11390400456023

Casters with Total Brakes and Locking system. Threaded Fork - 1/2"-12 Zine-Plated, Mounting Type - Threaded Stem Reinforced impact-resistant High-quality Impact Resistance Polypropylene Wheel Center, High-Quality Thermoplastic Rubber (TPR) Wheel Tread Pearl grey, Bearing - Ball Bearing.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 100mm
Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

Threaded Stem 1/2"-12

Threaded Size 25mm

Offset 38mm

Swivel Interference 230mm

Overall Height 130mm

Swivel Radius 115mm

Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic) 135kgs

Load Capacity (Static) 202.5kgs

Temperature -20°C to +60°C

Fork Type Swivel Caster With Total Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.76kgs

Standard ISO22883

Advantages at a glance

Rolling Resistance


• • • • •


Operating Noise

• • • •


Floor Surface Preservation • • • • •

Dimensions





Mounting

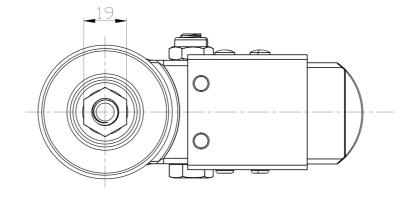

 $[\]boldsymbol{\ast}$ For any deviation between metric and imperial spec, please refer to the metric spec.