



## 1139 Medium Duty General Purposes Caster Series

Resolute (Pearlescent dark gray) Wheel Diameter x Wheel Width 100 x 31mm

EAN


YJ-11390400456153

Casters with a Total Brake and With locking system. Threaded Stem Riveted Pressed Fork  
—M12-P1.75.

Zinc-Plated, Mounting Type - Threaded Stem.

High-Quality Impact-Resistant Polypropylene core, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread.

Pearl-gray finish, Bearing—Ball Bearings.

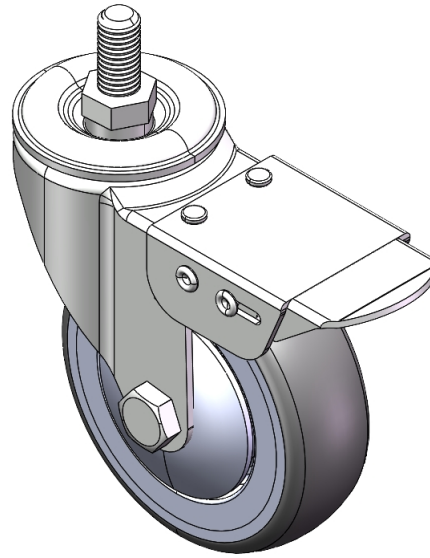

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

## Technical Data

☒ Imperial ☐ Metric

Wheel Diameter 4"

Wheel Width 1-1/4 "

## Wheel Bearing      Wheels With Ball Bearings

Threaded Stem M12-P1.75

Threaded Size 1"

Offset 1-1/2 "

Swivel Interference 9-1/8 "

Overall Height 5-3/16"

Swivel Radius 4-9/16"

Hardness Of Tread 72±5° Shore A

|                         |        |
|-------------------------|--------|
| Load Capacity (Dynamic) | 276lbs |
|-------------------------|--------|

|                        |        |
|------------------------|--------|
| Load Capacity (Static) | 413lbs |
|------------------------|--------|

Temperature -4°F to +140°F

Fork Type Swivel Caster With Total Brake

|           |     |
|-----------|-----|
| Stainless | N/A |
|-----------|-----|

|                         |     |
|-------------------------|-----|
| Electrical Conductivity | N/A |
|-------------------------|-----|

|             |     |
|-------------|-----|
| Anti-Static | N/A |
|-------------|-----|

Weight 1.7lbs

Standard ISO22883


### Advantages at a glance

Rolling Resistance ● ● ● ● ●


Operating Noise ● ● ● ● ●

Floor Surface Preservation ● ● ● ● ●

## Dimensions

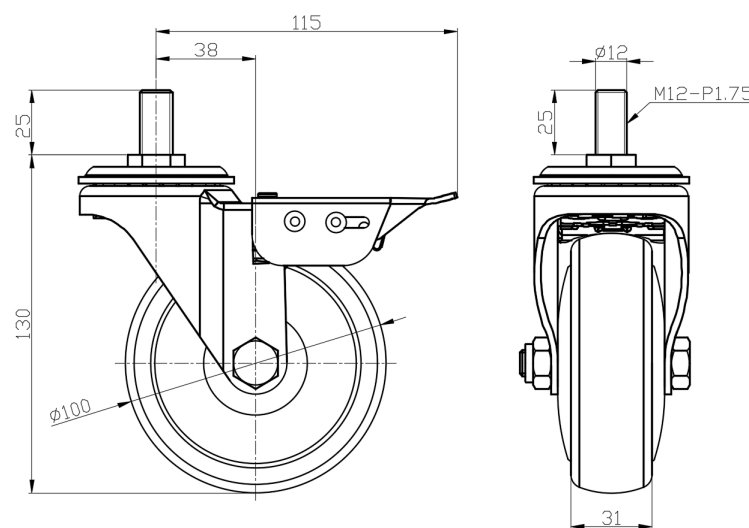

## Mounting

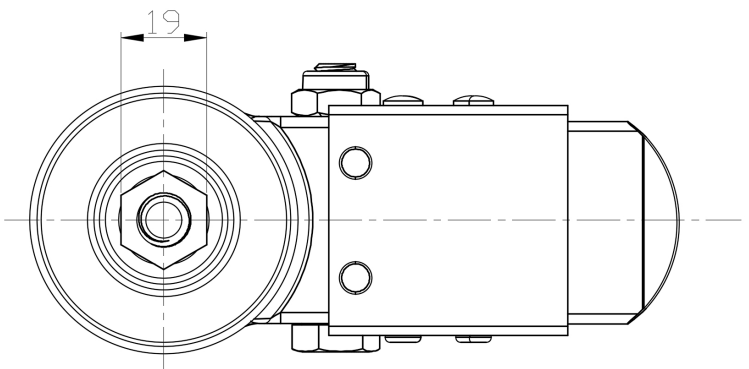

\* For any deviation between metric and imperial spec, please refer to the metric spec.