1139 Medium Duty General Purposes Caster Series



WHDR (Pearlescent dark gray) Wheel Diameter × Wheel Width 100x 31mm

EAN


YJ-11390400504013

Casters with Side Brakes and With locking system. Top Plate with Riveted Fork and 75 x 45 mm (3" x 1-3/4") Bolt Hole Spacing. Zine-Plated, Top Plate (4T) Mounting Type system.
Reinforced, impact-resistant polypropylene Wheel Center with High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread.

Pearl-gray finish, Bearing with Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 100mm Wheel Width 31mm

Drawings are for reference only and may differ from the product

Wheel Bearing Wheels With Ball Bearings

Plate Size 95 x 65mm **Bolt Hole Spacing** 75 x 45mm Plate Hole 12 x 9mm Offset 38mm Swivel Interference 178mm Overall Height 130mm Swivel Radius 89mm

Hardness Of Tread 95±5° Shore A

180kgs Load Capacity (Dynamic) Load Capacity (Static) 270kgs

Temperature -20°C to +60°C

Swivel Caster With Side Brake Fork Type

Stainless N/A **Electrical Conductivity** N/A Anti-Static N/A Weight 0.86kgs Standard ISO22883


Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation • • • • • •

Dimensions





Mounting

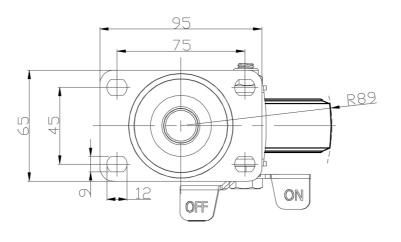

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.