1139 Medium Duty General Purposes Caster Series

Dersheng Casters Keep Rolling

Rubber Wheel Diameter × Wheel Width 125 x 30.5mm


EAN

YJ-11390500065013

Swivel Caster, thread-Riveted Stamping Fork—M12-P1.75
Zine-Plated, Mounting Type - Threaded Stem
Reinforced Polypropylene core, High-Quality Resilient Rubber Wheel Tread
Bearing —Plain Bearing

Wheel surface: high-quality elastic rubber Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 125mm
Wheel Width 30.5mm

Wheel Bearing Wheel With Plain Bearing

Threaded Stem M12-P1.75

Threaded Size 25mm

Offset 38mm

Swivel Interference 202mm

Overall Height 158mm

Swivel Radius 101mm

Hardness Of Tread 80+5° Shore

Hardness Of Tread 80±5° Shore A

Load Capacity (Dynamic) 90kgs

Load Capacity (Static) 135kgs

Temperature -20°C to +120°C

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity

Anti-Static

N/A

Weight

1.00kgs

Standard


ISO22883

Advantages at a glance


Rolling Resistance
Operating Noise

Floor Surface Preservation • • • • •

Dimensions

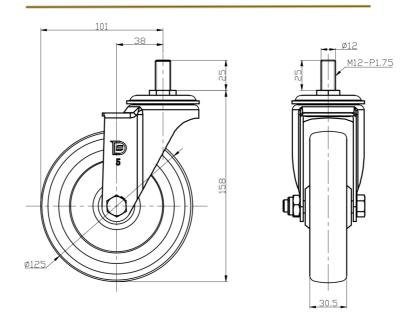



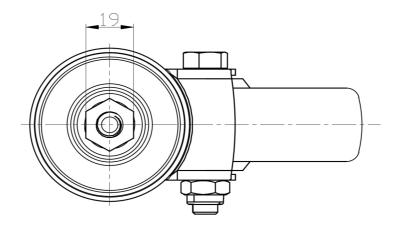

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.