## 1139 Medium Duty General Purposes Caster Series

Dersheng Casters Keep Rolling

Rubber Wheel Diameter × Wheel Width 125 x 30.5mm

EAN

YJ-11390500065013

Swivel Caster, thread-Riveted Stamping Fork—M12-P1.75
Zine-Plated, Mounting Type - Threaded Stem
Reinforced Polypropylene core, High-Quality Resilient Rubber Wheel Tread
Bearing —Plain Bearing

Wheel surface: high-quality elastic rubber Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product



Picture may differ from original product

## **Technical Data**

● Imperial ○ Metric

Wheel Diameter 5 "

Wheel Width 1-1/4 "

Wheel Bearing Wheel With Plain Bearing

Threaded Stem M12-P1.75

Threaded Size 1 "

Offset 1-1/2 "

Swivel Interference 8 "

Overall Height 6-5/16 "

Swivel Radius 4 "

Hardness Of Tread 80±5° Shore A
Load Capacity (Dynamic) 198lbs

Load Capacity (Static) 298lbs

Load Capacity (Static) 298lbs

Temperature -4°F to +248°F

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 2.2lbs

Standard ISO22883

## Advantages at a glance

Rolling Resistance


• • • • •


Operating Noise

• • • 0


Floor Surface Preservation  $\bullet \bullet \bullet \bullet \circ$ 

## Dimensions





Mounting

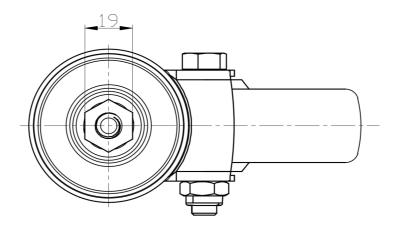

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.