1139 Medium Duty General Purposes Caster Series

Dersheng Casters Keep Rolling

Rubber Wheel Diameter × Wheel Width 125 x 30.5mm


EAN

YJ-11390500066223

Casters with Side Brakes and With locking system. Threaded Stem Riveted Pressed Fork -1/2"-13" Zine-Plated, expansion Mounting Type ($\oslash 21.6- \oslash 24$) Reinforced Polypropylene Wheel Center, High-Quality Resilient Rubber Wheel Tread Bearing - Plain Bearing

Wheel surface: high-quality elastic rubber Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 125mm
Wheel Width 30.5mm

Wheel Bearing Wheel With Plain Bearing

Expandable Stem 21.6 x 69mm

Offset 38mm

Swivel Interference 202mm

Overall Height 155mm

Swivel Radius 101mm

Hardness Of Tread 80±5° Shore A

Load Capacity (Dynamic) 90kgs

Load Capacity (Static) 135kgs

Temperature -20°C to +120°C

Fork Type Swivel Caster With Side Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.26kgs

Standard ISO22883

Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • • •

Dimensions

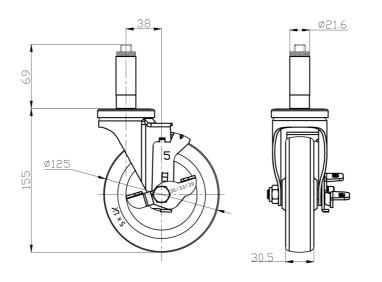

Mounting

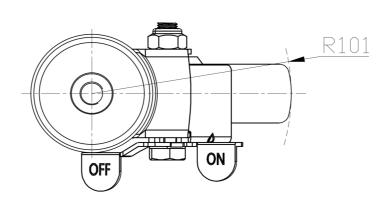

 $^{{}^{*}}$ For any deviation between metric and imperial spec, please refer to the metric spec.