## 1139 Medium Duty General Purposes Caster Series



PPR (Pearlescent dark gray) Wheel Diameter × Wheel Width 125 x 31mm

EAN


YJ-11390500265023

Swivel Caster, thread-Riveted Stamping Fork—1/2"-13"
Zine-Plated, Mounting Type - Threaded Stem
High-Quality Impact-Resistant Polypropylene core, High-Quality Reinforced Polypropylene
Rubber (TPR) Wheel Tread
Pearl-gray finish, Bearing—Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

## Technical Data

● Imperial ○ Metric

Wheel Diameter 5 "

Wheel Width 1-1/4 "

Wheel Bearing Wheels With Ball Bearings

Threaded Stem 1/2 " -13

Threaded Size 2-7/16 "

Offset 1-1/2 "

Swivel Interference 8 "

Overall Height 6-5/16 "

Swivel Radius 4 "

Hardness Of Tread 82±5° Shore A
Load Capacity (Dynamic) 243lbs

Load Capacity (Static) 364lbs

Temperature -4°F to +140°F
Fork Type Swivel Caster
Stainless N/A

Electrical Conductivity

Anti-Static

N/A

Weight

1.6lbs

Standard

ISO22883

## Advantages at a glance


Rolling Resistance


• • • 0

Operating Noise


Floor Surface Preservation • • • • •

## **Dimensions**





Mounting

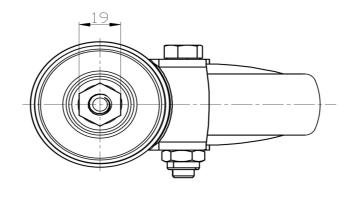

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.