# 1139 Medium Duty General Purposes Caster Series

Dersheng Casters Keep Rolling

WCPD (Black) Wheel Diameter × Wheel Width 125 x 31mm

EAN

YJ-11390500444063

Casters with Total Brakes and With locking system. Top Plate with Riveted, Stamping Fork —75 x 45 mm (3" x 1-3/4") Bolt Hole Spacing.

Zine-Plated, Top Plate (4T) Mounting Type system.

Polypropylene Wheel Center and Wheel Tread.

Black, Bearing—Ball Bearings.

Wheel surface: Simplified wheel surface wheel core

Wheel Center: Not displayed

Drawings are for reference only and may differ from the product



Picture may differ from original product

### Technical Data

● Metric ○ Imperial

Wheel Diameter 125mm
Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 95 x 65mm **Bolt Hole Spacing** 75 x 45mm Plate Hole 12 x 9mm Offset 38mm 230mm **Swivel Interference** Overall Height 158mm **Swivel Radius** 115mm Hardness Of Tread 72±5° Shore D

Load Capacity (Dynamic) 200kgs

Load Capacity (Static) 300kgs

Temperature -12°C to +60°C

Fork Type Swivel Caster With Total Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.94kgs

Standard ISO22883

## Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • • •

#### Dimensions

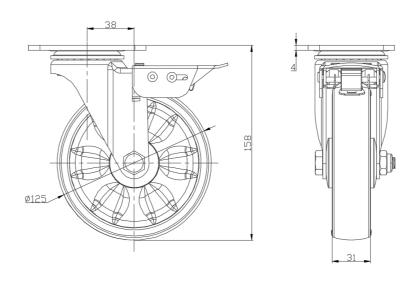

## Mounting

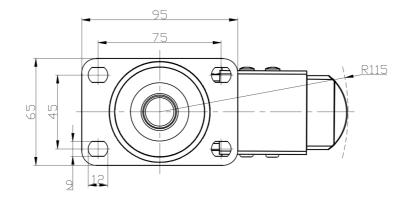

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.