1139 Medium Duty General Purposes Caster Series



W Resolute (Pearlescent dark gray) Wheel Diameter × Wheel Width 125 x 31mm

EAN

YJ-11390500451013

Rigid Caster with Stamping Fabricated Caster Fork and 75 x 45 mm (3" x 1-3/4") Bolt Hole Spacing.


Zine-Plated, Mounting Type - Top Plate.
Reinforced, impact-resistant polypropylene core with High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread.

Pearl-gray finish. Bearings: Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

Wheel Width

● Imperial ○ Metric

5 " Wheel Diameter 1-1/4 "

Wheel Bearing Wheels With Ball Bearings

3-11/16 " x 2-1/2 " Plate Size **Bolt Hole Spacing** 3" x 1-13/16" 1/2 " x 23/64 " Plate Hole 6-5/16 " Overall Height

Hardness Of Tread 72±5° Shore A Load Capacity (Dynamic) 324lbs

Load Capacity (Static) 486lbs Temperature -4°F to +140°F Fork Type Rigid Caster Stainless N/A **Electrical Conductivity** N/A Anti-Static N/A Weight 1.3lbs Standard ISO22883


Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation • • • • •

Dimensions





Mounting

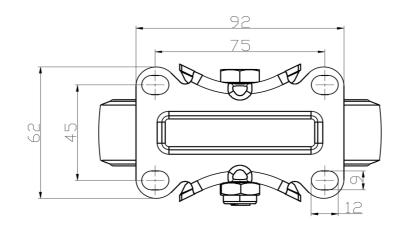

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.