# 1139 Medium Duty General Purposes Caster Series



W Resolute (Pearlescent dark gray) Wheel Diameter × Wheel Width 125 x 31mm

EAN

YJ-11390500452013

Swivel Caster with Riveted Fork and Stamping Fork—75 x 45 mm (3" x 1-3/4") Bolt Hole Spacing


Zine-Plated, Top Plate (4T) Mounting Type system
Reinforced, impact-resistant polypropylene core with High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread

Pearl-gray finish, Bearing—Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

### **Technical Data**

● Imperial ○ Metric

5 " Wheel Diameter 1-1/4 " Wheel Width

Wheel Bearing Wheels With Ball Bearings

3-13/16 " x 2-9/16 " Plate Size **Bolt Hole Spacing** 3" x 1-13/16" 1/2 " x 23/64 "

Plate Hole 1-1/2 " Offset Swivel Interference 6-5/16 " Overall Height Swivel Radius

Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic) 324lbs Load Capacity (Static) 486lbs -4°F to +140°F Temperature Fork Type **Swivel Caster** 

Stainless N/A **Electrical Conductivity** N/A Anti-Static N/A Weight 1.9lbs Standard ISO22883


## Advantages at a glance

Rolling Resistance


**Operating Noise** 

Floor Surface Preservation • • • • •

#### **Dimensions**

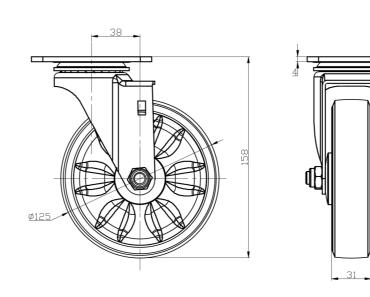

## Mounting

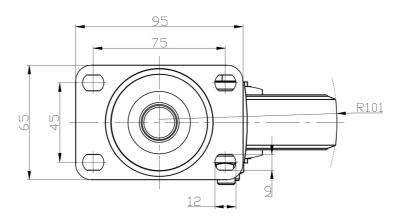

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.