


AQPU (grey round) Wheel Diameter x Wheel Width 125 x 31mm

EAN

YJ-11390500602043

Swivel Caster with Riveted Fork and Stamping Fork—75 x 45 mm (3" x 1-3/4") Bolt Hole Spacing
Zinc-Plated, Top Plate (4T) Mounting Type system
Aluminum core, High Quality Polyurethane Wheel Tread
Gray, Bearing—Ball Bearings.

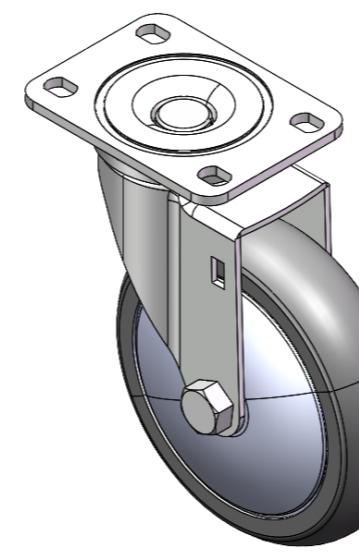

Wheel tread: Made of high-quality polyurethane
Wheel Center: aluminum core

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data

Metric Imperial

Wheel Diameter 125mm

Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 95 x 65mm

Bolt Hole Spacing 75 x 45mm

Plate Hole 12 x 9mm

Offset 38mm

Swivel Interference 202mm

Overall Height 158mm

Swivel Radius 101mm

Hardness Of Tread 77±5° Shore A

Load Capacity (Dynamic) 230kgs

Load Capacity (Static) 345kgs

Temperature -20°C to +70°C

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.10kgs

Standard ISO22883


Advantages at a glance

Rolling Resistance • • • •


Operating Noise • • • •

Floor Surface Preservation • • • •

Dimensions

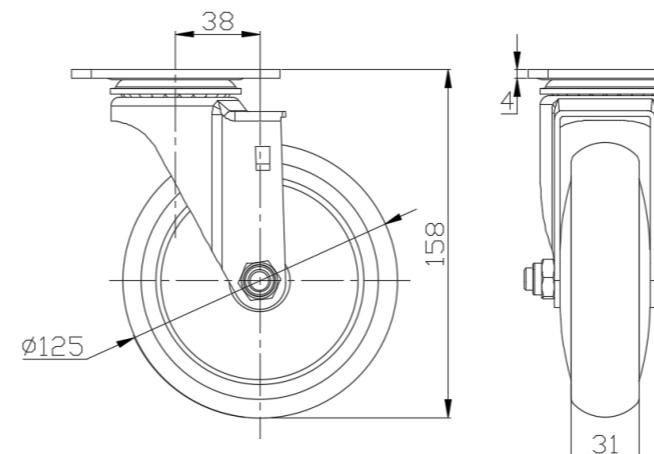

Mounting

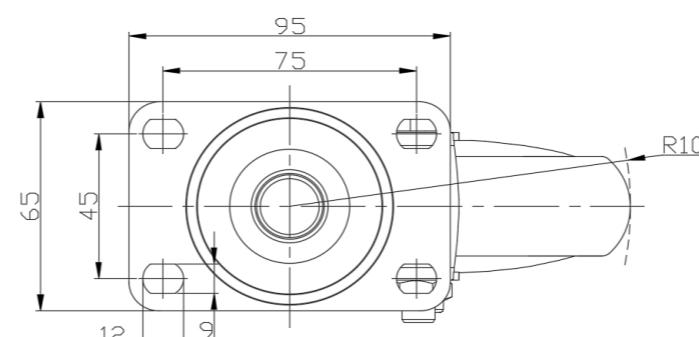

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com