1139 Medium Duty General Purposes Caster Series



AQPU (grey round) Wheel Diameter × Wheel Width 125 x 31mm

EAN


YJ-11390500604073

Casters with Side Brakes and With locking system. Top Plate Riveted and Fork – 75 x 45 mm (3" x 1-3/4") Bolt Hole Spacing.
Zine-Plated, Top Plate (4T) Mounting Type system.
Aluminum core, High Quality Polyurethane Wheel Tread.
Gray. Bearings – Ball Bearings.

Wheel tread: Made of high-quality polyurethane

Wheel Center: aluminum core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 5 "

Wheel Width 1-1/4 "
Wheel Bearing Wheels With Ball Bearings

Plate Size 3-13/16 " x 2-9/16 "

Bolt Hole Spacing 3 " x 1-13/16 "

Plate Hole 1/2 " x 23/64 "

Offset 1-1/2 "
Swivel Interference 8 "
Overall Height 6-5/16 "
Swivel Radius 4 "

Hardness Of Tread 77±5° Shore A

Load Capacity (Dynamic) 507lbs

Load Capacity (Static) 761lbs

Temperature -4°F to +158°F

Fork Type Swivel Caster With Side Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 2.6lbs

Standard ISO22883

Advantages at a glance

Rolling Resistance


• • • • •


Operating Noise

• • • • •


Floor Surface Preservation • • • • •

Dimensions





Mounting

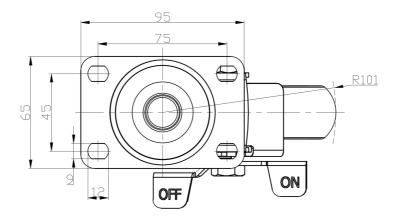

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.