1148 48 48 Series Central Locking Caster Series (All Plastic)

Dersheng Casters Keep Rolling

Resolute Rubber wheel (White dark gray) Wheel Diameter x Wheel Width 150 x 15mm

EAN

YJ-11480600458010

Castors with long lever Hexagonal hole, Cam center lock, full locking or fixed system. Single Bolthole Stamping Fork Wheel Fork made of polyamide - white, Mounting Type - Single Bolthole High-quality Impact Resistance Polypropylene Wheel Center, High-Quality Thermoplastic Rubber (TPR) Wheel Tread White dark grey, Bearing - Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

Wheel Width

● Imperial ○ Metric

6 " Wheel Diameter

Wheels With Ball Bearings Wheel Bearing

Diameter 1-1/8 " 3-7/8 " Stem Hole Spec Offset 1-15/16 " 10 " **Swivel Interference** 6-1/8 " Overall Height 5" **Swivel Radius**

72±5° Shore A Hardness Of Tread

331lbs Load Capacity (Dynamic) Load Capacity (Static) 496lbs

-4°F to +140°F Temperature

Fork Type Swivel Caster With Total Brake

Stainless N/A N/A **Electrical Conductivity** Anti-Static N/A Weight 2.9lbs Standard ISO22881


Advantages at a glance

Rolling Resistance


Operating Noise

Floor Surface Preservation • • • • •

Dimensions

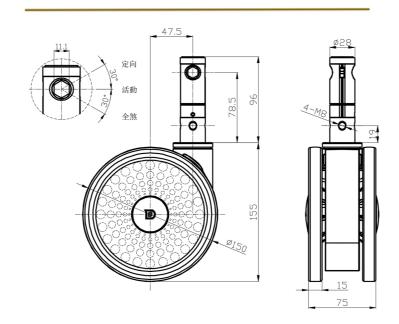

Mounting

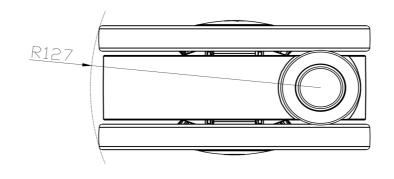

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.