

1150 Medium Duty General Purposes Caster Series

MRC (Transparent) Wheel Diameter x Wheel Width 100 x 32mm


EAN

YJ-11500400072013

Swivel Casters, Single Bolthole Stamping Fork— $\varnothing 12.5$
 Zinc-Plated surface, Single Bolthole Mounting Type device
 Reinforced Polypropylene and Wheel Tread
 Transparent, Bearing—Ball Bearings.

Wheel surface: Thermoplastic (PA6)
 Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

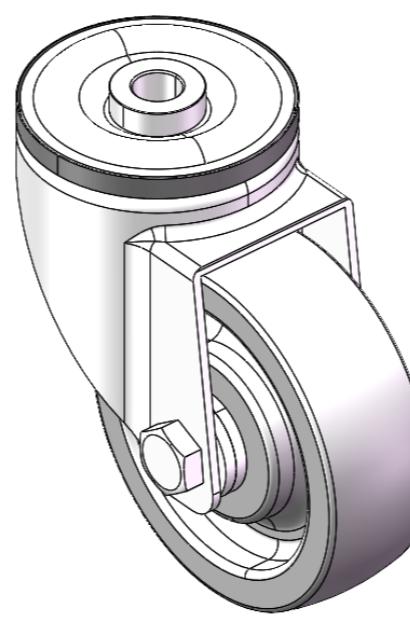

Picture may differ from original product

Technical Data

 Metric Imperial

Wheel Diameter 100mm

Wheel Width 32mm

Wheel Bearing Wheels With Ball Bearings

Single Bolt HoleCentre Hole 12.5mm

Offset 40mm

Swivel Interference 176mm

Overall Height 128mm

Swivel Radius 88mm

Hardness Of Tread $75\pm 5^\circ$ Shore D

Load Capacity (Dynamic) 200kgs

Load Capacity (Static) 300kgs

Temperature -20°C to $+80^\circ\text{C}$

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.77kgs

Standard ISO22883


Advantages at a glance

Rolling Resistance •••••


Operating Noise ••○○○

Floor Surface Preservation ••○○○

Dimensions

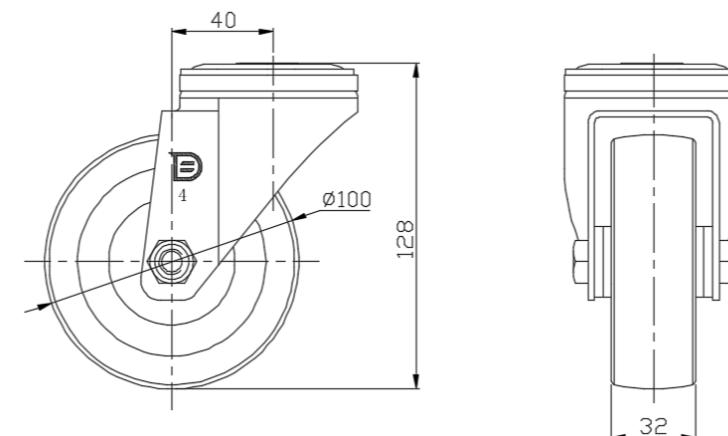

Mounting

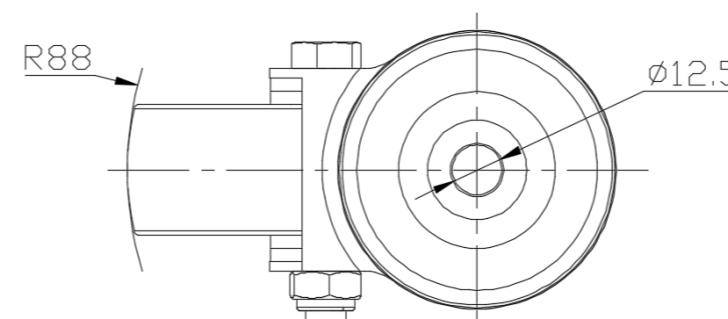

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com