

1150 Medium Duty General Purposes Caster Series

MRC (Transparent) Wheel Diameter x Wheel Width 100 x 32mm


EAN

YJ-11500400072013

Swivel Casters, Single Bolthole Stamping Fork— $\varnothing 12.5$
 Zinc-Plated surface, Single Bolthole Mounting Type device
 Reinforced Polypropylene and Wheel Tread
 Transparent, Bearing—Ball Bearings.

Wheel surface: Thermoplastic (PA6)
 Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

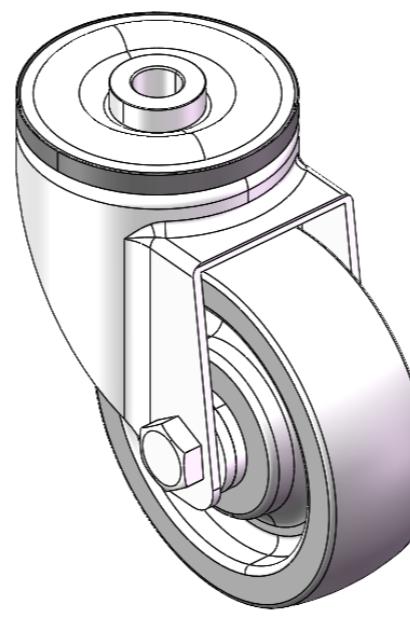

Picture may differ from original product

Technical Data


 Imperial Metric

Wheel Diameter	4 "
Wheel Width	1-5/16 "
Wheel Bearing	Wheels With Ball Bearings
Single Bolt HoleCentre Hole	1/2 "
Offset	1-5/8 "
Swivel Interference	7 "
Overall Height	5-1/16 "
Swivel Radius	3-1/2 "
Hardness Of Tread	75±5° Shore D
Load Capacity (Dynamic)	441lbs
Load Capacity (Static)	661lbs
Temperature	-4°F to +176°F
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	1.7lbs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • ○ ○ ○
Floor Surface Preservation	• • ○ ○ ○

Dimensions

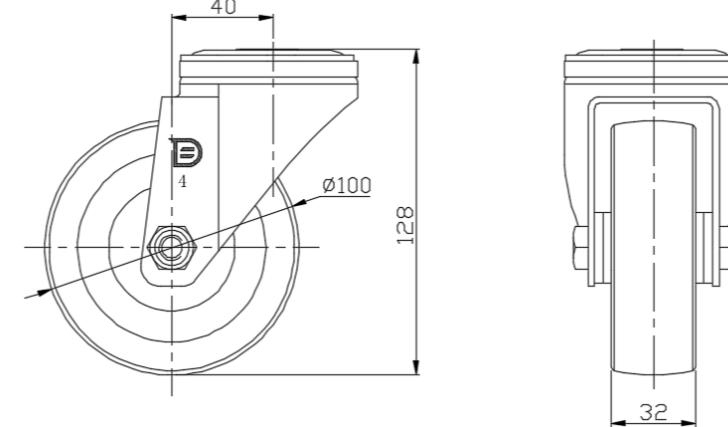

Mounting

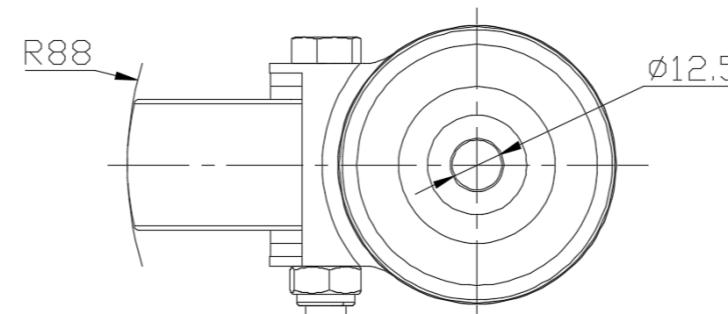

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com