


## 1150 Medium Duty General Purposes Caster Series

AQPU (grey round) Wheel Diameter x Wheel Width 100 x 40mm

EAN

YJ-11500400602013

Swivel Casters, Riveted and Stamping Top Plate—44.5 x 30mm (1-3/4" x 1-1/8") Bolt Hole Spacings Zinc-Plated surface, Top Plate type (3T) Mounting Type device Aluminum core, High Quality Polyurethane Wheel Tread Gray, Bearing—Ball Bearings.

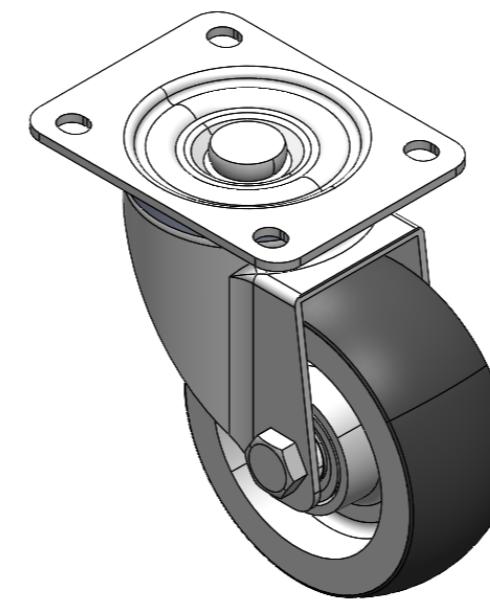

Picture may differ from original product

Wheel Tread: High-Quality Polyurethane

Wheel Center: Aluminum core

Drawings are for reference only and may differ from the product

## Technical Data

 Metric  Imperial

Wheel Diameter 100mm

Wheel Width 40mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 104 x 80mm

Bolt Hole Spacing 80 x 60mm

Plate Hole 10.5 x 9mm

Offset 40mm

Swivel Interference 180mm

Overall Height 128mm

Swivel Radius 90mm

Hardness Of Tread 77±5° Shore A

Load Capacity (Dynamic) 250kgs

Load Capacity (Static) 375kgs

Temperature -20°C to +70°C

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.05kgs

Standard ISO22883


## Advantages at a glance

Rolling Resistance •••••


Operating Noise •••••

Floor Surface Preservation •••••

## Dimensions

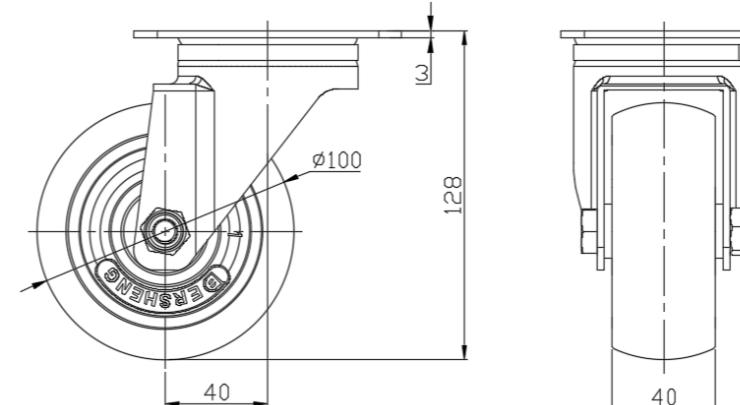

## Mounting

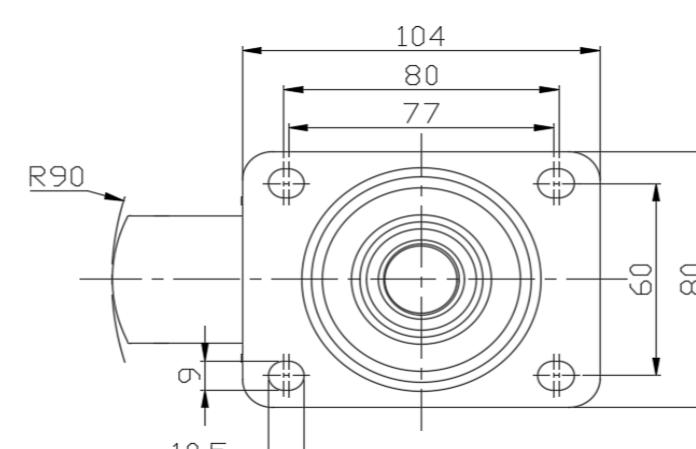

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com