

1150 Medium Duty General Purposes Caster Series

All-purpose elastic wheel (black & blue) Wheel diameter x Wheel width 125x36 mm


A

YJ-11500500457013

Portable Casters, Single Bolthole Stamping Fork— $\varnothing 12.5$
 Zinc-Plated surface, Single Bolthole Mounting Type device
 High-Quality impact-resistant polypropylene Wheel Center, thermoplastic elastomer
 Wheel Tread
 Black and blue, Bearing—Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)
 Wheel Center: High-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

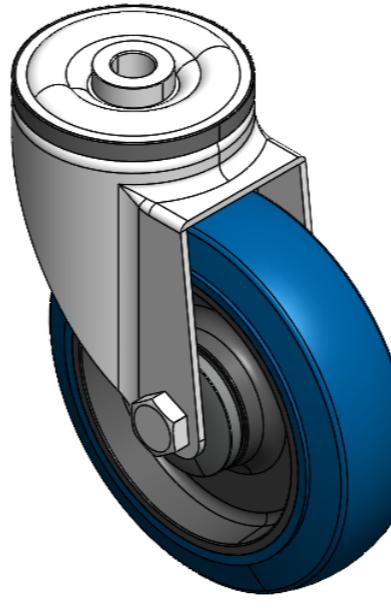

Picture may differ from original product

Technical Data


 Imperial Metric

Wheel Diameter	5 "
Wheel Width	1-7/16 "
Wheel Bearing	Wheels With Ball Bearings
Single Bolt HoleCentre Hole	1/2 "
Offset	1-5/8 "
Swivel Interference	8-1/8 "
Overall Height	6-1/8 "
Swivel Radius	4-1/16 "
Hardness Of Tread	72±5° Shore A
Load Capacity (Dynamic)	551lbs
Load Capacity (Static)	827lbs
Temperature	-4°F to +140°F
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	1.7lbs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • • •
Floor Surface Preservation	• • • •

Dimensions

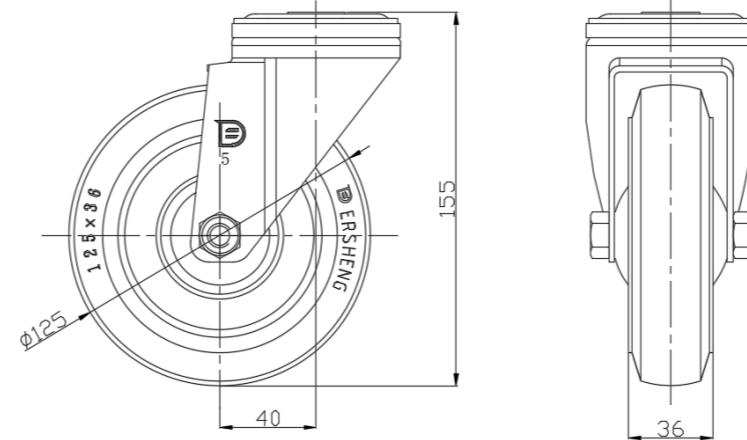

Mounting

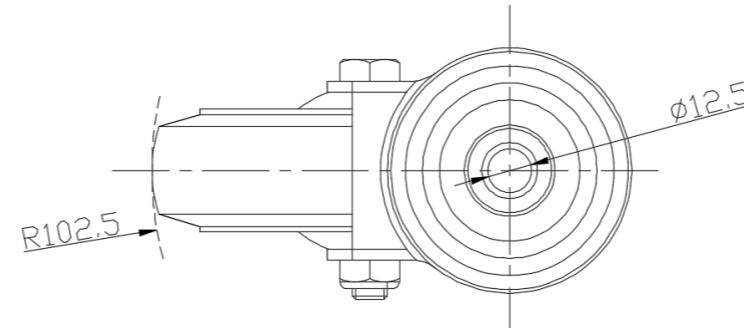

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com