

1151D Heavy Duty 1.5" Wide General Purposes Caster Series



SX Rubber Wheel Diameter × Wheel Width 100 x 35mm


EAN

YJ-11510400034023

Casters with Total Brakes and a Locking system. Top Plate Riveted and Stamping with 85 x 70mm (3-3/8" x 2-3/4") Bolt Hole Spacing. E-Coat Finish, Top Plate (4T) Mounting Type. Cast Iron Wheel Center with High-Quality Resilient Rubber tread. Black, Bearing with Ball Bearing.

Wheel Tread: high-quality elastic rubber
Wheel Center: cast iron core

Drawings are for reference only and may differ from the product

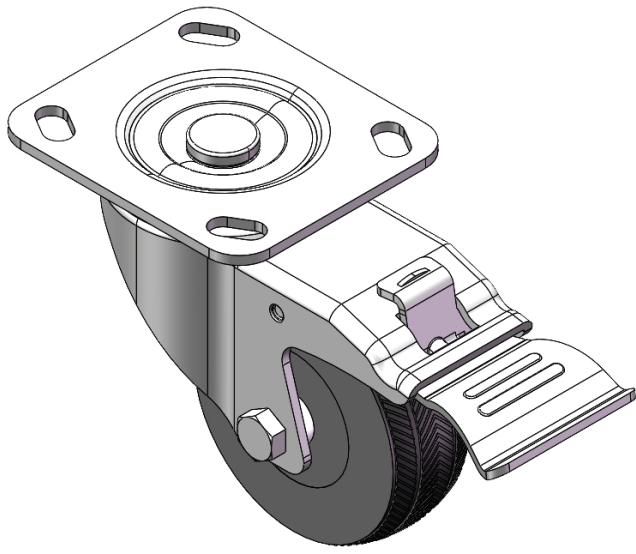

Picture may differ from original product


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter	100mm
Wheel Width	35mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	115 x 100mm
Bolt Hole Spacing	85 x 70mm
Plate Hole	20 x 12mm
Offset	50mm
Swivel Interference	328mm
Overall Height	130mm
Swivel Radius	164mm
Hardness Of Tread	80±5° Shore A
Load Capacity (Dynamic)	150kgs
Load Capacity (Static)	225kgs
Temperature	-20°C to +120°C
Fork Type	Swivel Caster With Total Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	1.81kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ○

Dimensions

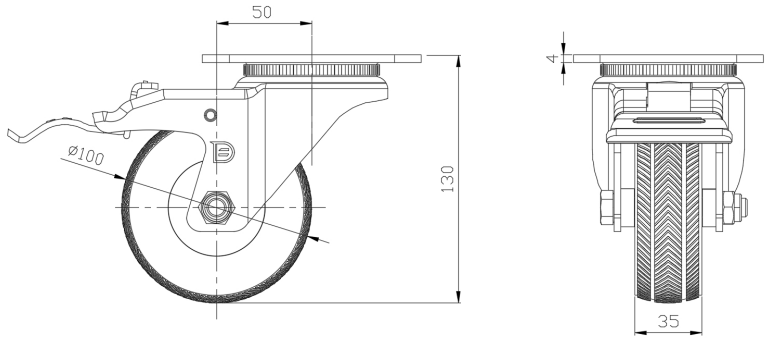

Mounting

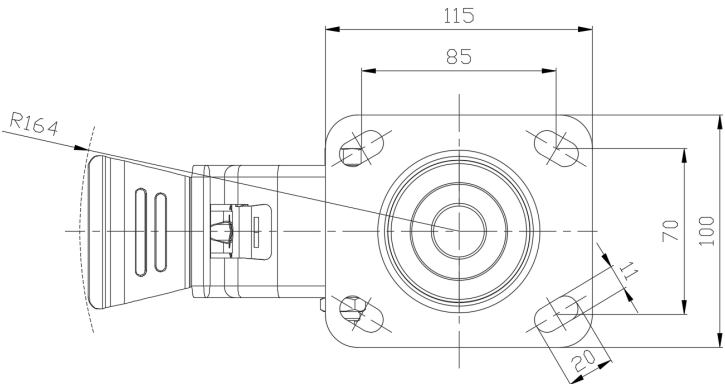

* For any deviation between metric and imperial spec, please refer to the metric spec.