1151D Heavy Duty 1.5" Wide General Purposes Caster Series



MRC (Transparent) Wheel Diameter × Wheel Width 100 x 32mm

EAN

YJ-11510400072013

Swivel Caster, Top Plate Riveted and Stamping with 85 x 70mm (3-3/8" x 2-3/4") Bolt Hole Spacing Mounting Type.
Zine-Plated, Top Plate (4T) Mounting Type mechanism.
Reinforced Polypropylene Wheel Center and Wheel Tread.

Bearings—Ball Bearings.

Wheel tread: Thermoplastic (PA6) Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

4 " Wheel Diameter

1-5/16 " Wheel Width

Wheel Bearing Wheels With Ball Bearings

4-9/16 " x 4 " Plate Size Bolt Hole Spacing 3-7/16" x 2-13/16" 13/16 " x 3/8 " Plate Hole

Offset 1-5/8 " 7-1/8 " Swivel Interference 5-3/16" Overall Height 3-9/16 " Swivel Radius Hardness Of Tread 75±5° Shore D

Load Capacity (Dynamic) 441lbs Load Capacity (Static) 661lbs

Temperature -4°F to +176°F Fork Type **Swivel Caster**

Stainless N/A **Electrical Conductivity** N/A N/A Anti-Static Weight 2.6lbs Standard ISO22883


Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation • • • • • •

Dimensions





Mounting

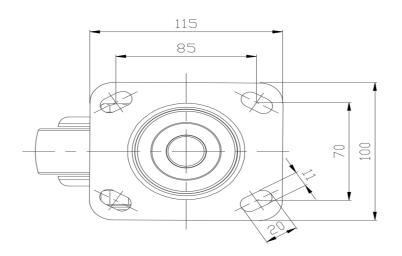

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.