# 1151D Heavy Duty 1.5" Wide General Purposes Caster Series



PU (red flat wheel) Wheel Diameter × Wheel Width 100 × 34 mm


EAN

#### YJ-11510400332013

Swivel Caster, Top Plate Riveted Stamping Fork - D-type hole Surface Zine-Plated, Mounting Type - Top Plate Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread Iron red, Bearing - Ball Bearing.

Wheel tread: Made of high quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

#### Technical Data

#### ● Imperial ○ Metric

Wheel Diameter 4 "

Wheel Width 1-3/8 "

Wheel Bearing Wheels With Ball Bearings

Plate Size 4-9/16 " x 4 "

Bolt Hole Spacing 3-7/16 " x 2-13/16 "

Plate Hole 13/16 " x 3/8 "

Offset 1-5/8 "

Swivel Interference 7-1/4 "

Overall Height 5-3/16 "

Swivel Radius 3-5/8 "

Hardness Of Tread 93±5° Shore A

Load Capacity (Dynamic) 441lbs

Load Capacity (Static) 661lbs

Temperature -4°F to +158°F

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 3.6lbs

Standard ISO22883

## Advantages at a glance

Rolling Resistance


• • • 0 0


Operating Noise

• • • • 0


Floor Surface Preservation  $\bullet \bullet \bullet \bullet \circ$ 

### Dimensions





## Mounting

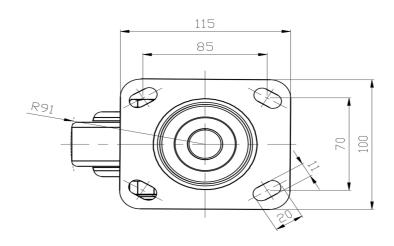

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.