## 1151D Heavy Duty 1.5" Wide General Purposes Caster Series



CPD (White) Wheel Diameter × Wheel Width 100 x 32mm


EAN

YJ-11510400444023

Castors with Total Brake Locking system. Top Plate Riveted Stamping Fork -  $85 \times 70$ mm (3-3/8" x 2-3/4") Bolt Hole Spacing Surface Zine-Plated, Top Plate (4T) Mounting Type device Reinforced Polypropylene and Wheel Tread White, Bearing - Ball Bearing.

Wheel tread: Thermoplastic (PA6)
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

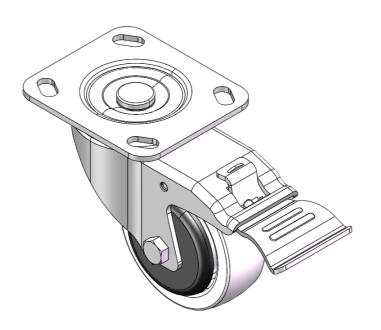

Picture may differ from original product

## Technical Data

● Metric ○ Imperial

Wheel Diameter 100mm
Wheel Width 32mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 115 x 100mm **Bolt Hole Spacing** 85 x 70mm Plate Hole 20 x 11mm Offset 40mm 328mm Swivel Interference Overall Height 130mm **Swivel Radius** 164mm Hardness Of Tread 72±5° Shore D

Load Capacity (Dynamic) 150kgs
Load Capacity (Static) 225kgs

Temperature -12°C to +60°C

Fork Type Swivel Caster With Total Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A


Weight 1.49kgs

Standard ISO22883


## Advantages at a glance

Rolling Resistance  $\bullet \bullet \bullet \bullet \bullet$ Operating Noise  $\bullet \bullet \bullet \circ \circ$ Floor Surface Preservation  $\bullet \bullet \bullet \circ \circ$ 



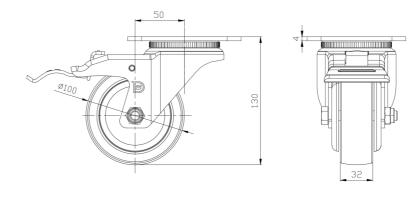

## Mounting

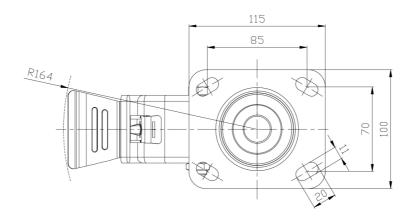

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.