

## 1151 51 European Standard Base Plate Series

W Resolute (black, dark gray) Wheel Diameter x Wheel Width 100 x 36mm


A

YJ-11510400454033

Equipped with double-brake, locking Casters. Riveted and Stamping Top Plate legs – 44.5 x 30mm (1-3/4" x 1-1/8") Bolt Hole Spacings.  
 Zinc-Plated surface, Top Plate (4T) Mounting Type device.  
 Reinforced impact-resistant polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread.  
 Dark gray, Bearing – Ball Bearings.

Wheel surface: Thermoplastic elastomer (TPR)  
 Wheel Center: Reinforced impact-resistant polypropylene

Drawings are for reference only and may differ from the product

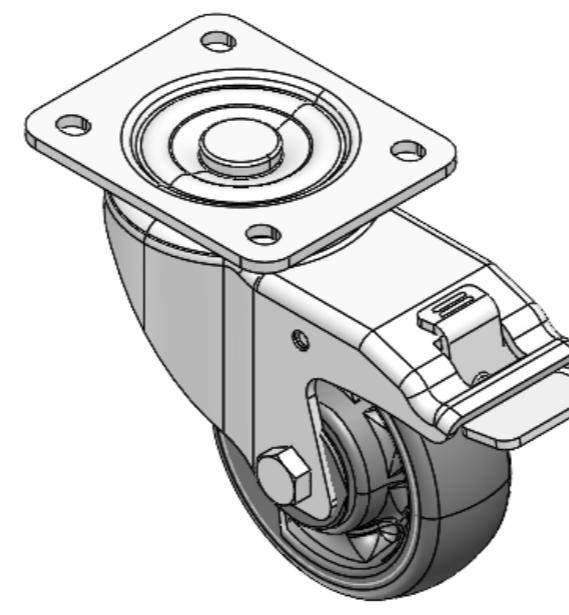

Picture may differ from original product

## Technical Data


 Metric  Imperial

Wheel Diameter	100mm
Wheel Width	36mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	105 x 85mm
Bolt Hole Spacing	80 x 60mm
Plate Hole	10.5 x 9mm
Offset	50mm
Swivel Interference	266mm
Overall Height	130mm
Swivel Radius	133mm
Hardness Of Tread	72±5° Shore A
Load Capacity (Dynamic)	130kgs
Load Capacity (Static)	195kgs
Temperature	-20°C to +60°C
Fork Type	Swivel Caster With Total Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	1.24kgs
Standard	ISO22883


## Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • • •
Floor Surface Preservation	• • • •

## Dimensions

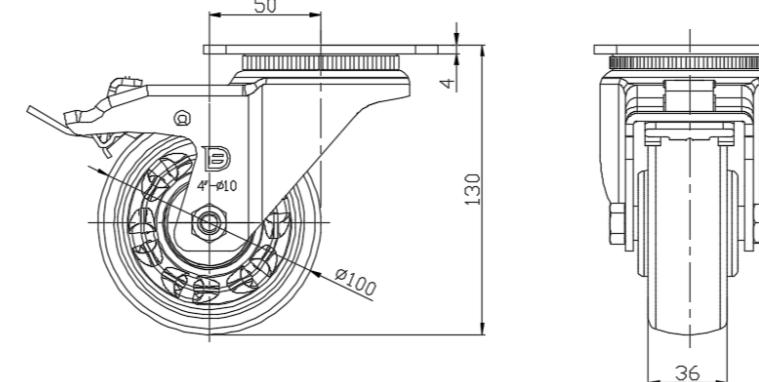

## Mounting

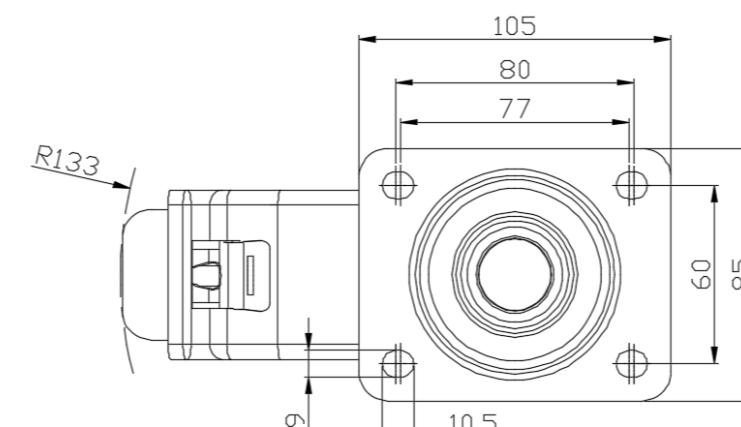

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com