# 1151D Heavy Duty 1.5" Wide General Purposes Caster Series



QPU (Grey flat) Wheel Diameter × Wheel Width 100 x 34mm

EAN

YJ-11510400531023

Rigid Caster with integral Stamping Fork and 85 x 70mm (3-3/8" x 2-3/4") Bolt Hole Spacing. Zine-Plated, Top Plate (3.5T) Mounting Type system. Cast Iron Wheel Center with High Quality Polyurethane tread. Gray color, Ball Bearing.

Wheel tread: Made of high-quality polyurethane

Wheel Center: cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

#### **Technical Data**

● Imperial ○ Metric

Wheel Diameter 4 "

Wheel Width 1-3/8 "

Wheel Bearing

Wheels With Ball Bearings

Plate Size

4-11/16 " x 3-13/16 "

 Bolt Hole Spacing
 3-3/8 " x 2-3/4 "

 Plate Hole
 13/16 " x 3/8 "

 Overall Height
 5-3/16 "

Hardness Of Tread 77±5° Shore A

Load Capacity (Dynamic) 661lbs

Load Capacity (Static) 992lbs

Temperature -4°F to +158°F

Fork Type Rigid Caster

Stainless N/A

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 2.8lbs

Standard ISO22883


### Advantages at a glance


Rolling Resistance

Operating Noise • • •


Floor Surface Preservation • • • • •

### Dimensions





## Mounting

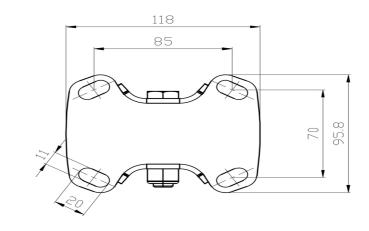

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.