1151D Heavy Duty 1.5" Wide General Purposes Caster Series



QPU (Brown round) Wheel Diameter × Wheel Width 100 x 34mm

EAN

YJ-11510400534063

Casters with Total Brakes and Locking system. Top Plate Riveted and Stamping 85 x 70mm (3-3/8" x 2-3/4") Bolt Hole Spacing. Zine-Plated, Top Plate (4T) Mounting Type system. Cast Iron Wheel Center with High Quality Polyurethane tread. Brown color, Bearing with Ball Bearing.


92±5° Shore A

992lbs

Wheel tread: Made of high-quality polyurethane

Wheel Center: cast iron core

Drawings are for reference only and may differ from the product

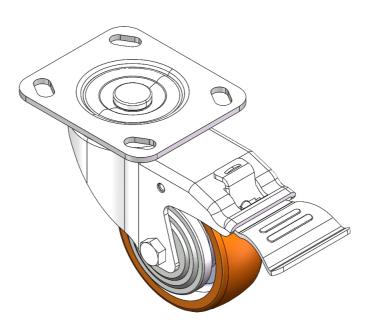

Picture may differ from original product

Technical Data

● Imperial ○ Metric

Hardness Of Tread

Load Capacity (Static)

Wheel Diameter 4 "

Wheel Width 1-3/8 "

Wheel Bearing Wheels With Ball Bearings

Plate Size 4-9/16 " x 4 "

Bolt Hole Spacing 3-3/8 " x 2-3/4 "

Plate Hole 13/16 " x 3/8 "

Offset 2 "
Swivel Interference 13 "
Overall Height 5-3/16 "
Swivel Radius 6-1/2 "

Load Capacity (Dynamic) 661lbs

Temperature -4°F to +158°F

Fork Type Swivel Caster With Total Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 4.3lbs

Standard ISO22883

Advantages at a glance

Rolling Resistance


• • • •


Operating Noise

• • • • •


Floor Surface Preservation • • • • •

Dimensions





Mounting

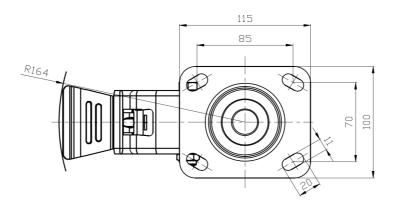

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.