

1151D Heavy Duty 1.5" Wide General Purposes Caster Series




AQPU (grey round) Wheel Diameter x Wheel Width 100 x 40mm

EAN

YJ-11510400602073

Swivel castor, Top Plate Riveted Stamping Fork - high-grade hole Surface Zinc-Plated, Top Plate (4T) Mounting Type device Aluminum core, High Quality Polyurethane Wheel Tread Gray, Bearing - Ball Bearing.

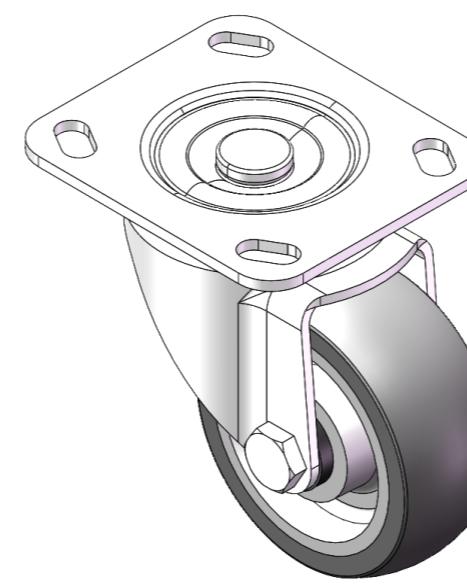

Wheel tread: Made of high quality polyurethane

Wheel Center: Aluminum core

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data

 Imperial Metric

Wheel Diameter

4 "

Wheel Width

1-5/8 "

Wheel Bearing

Wheels With Ball Bearings

Plate Size

4-9/16 " x 4 "

Bolt Hole Spacing

3-3/8 " x 2-3/4 "

Plate Hole

13/16 " x 3/8 "

Offset

1-5/8 "

Swivel Interference

7-1/8 "

Overall Height

5-3/16 "

Swivel Radius

3-9/16 "

Hardness Of Tread

77±5° Shore A

Load Capacity (Dynamic)

441lbs

Load Capacity (Static)

661lbs

Temperature

-4°F to +158°F

Fork Type

Swivel Caster

Stainless

N/A

Electrical Conductivity

N/A

Anti-Static

N/A

Weight

2.9lbs

Standard

ISO22883


Advantages at a glance

Rolling Resistance • • • •


Operating Noise • • • •

Floor Surface Preservation • • • •

Dimensions

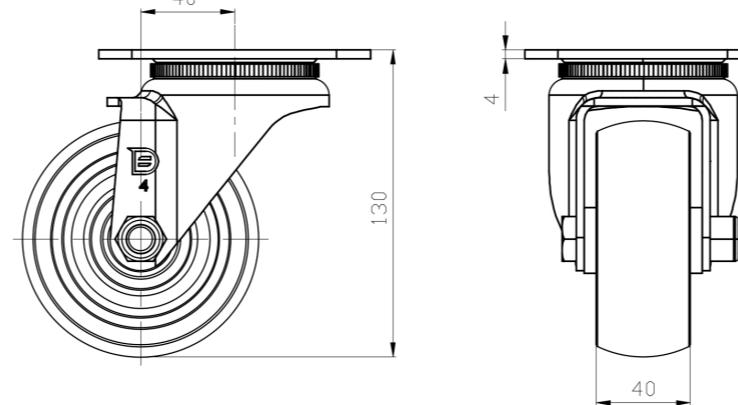

Mounting

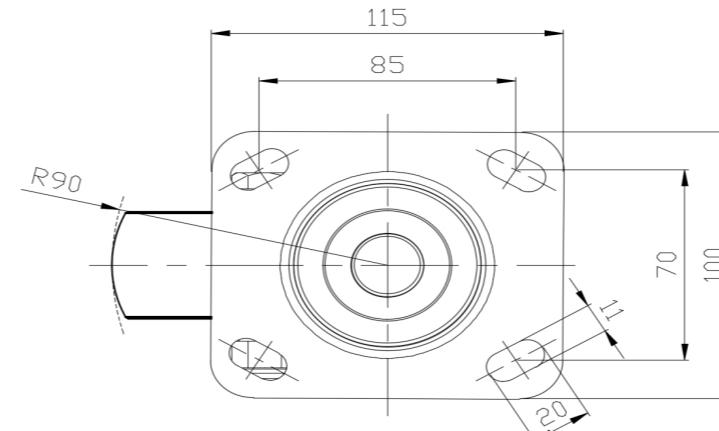

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com