1151D Heavy Duty 1.5" Wide General Purposes Caster Series

Dersheng Casters Keep Rolling

AQPU (brown round) Wheel Diameter × Wheel Width 100 x 40mm

EAN


YJ-11510400602083

Swivel Caster, Top Plate Riveted Stamping Fork - high-grade hole Surface Zine-Plated, Top Plate type (4T) Mounting Type device Aluminum core, High Quality Polyurethane Wheel Tread Brown, Bearing - Ball Bearing.

Wheel tread: Made of high quality polyurethane

Wheel Center: Aluminum core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Load Capacity (Static)

Wheel Diameter 100mm
Wheel Width 40mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 115 x 100mm **Bolt Hole Spacing** 85 x 70mm Plate Hole 20 x 11mm Offset 40mm **Swivel Interference** 180mm Overall Height 130mm **Swivel Radius** 90mm Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 200kgs

Temperature -20°C to +70°C

Fork Type Swivel Caster

300kgs

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.32kgs

Standard ISO22883

Advantages at a glance


Rolling Resistance


Operating Noise

Floor Surface Preservation


• • • • •

Dimensions





Mounting

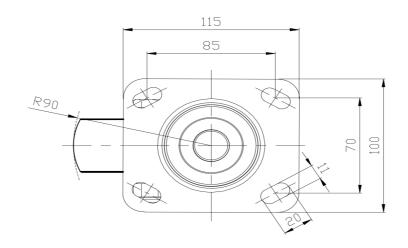

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.