1151D Heavy Duty 1.5" Wide General Purposes Caster Series



SX Rubber Wheel Diameter × Wheel Width 125 x 40mm

EAN

YJ-11510500031013

Rigid Caster with integral Stamping Fork and D-shaped hole. Zine-Plated, Top Plate (3.5T) Mounting Type system. Cast Iron Wheel Center with High-Quality Resilient Rubber tread. Black, Ball Bearing.

Wheel Tread: high-quality elastic rubber

Wheel Center: cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 5 "

Wheel Width 1-5/8 "

Wheel Bearing

Wheels With Ball Bearings

Plate Size

4-11/16 " x 3-13/16 "

Bolt Hole Spacing 3-7/16 " x 2-13/16 "

Plate Hole 13/16 " x 3/8 "

Overall Height 6-1/8 "

Hardness Of Tread 80±5° Shore A

Load Capacity (Dynamic) 441lbs

Load Capacity (Static) 661lbs

Temperature -4°F to +248°F

Fork Type Rigid Caster

Stainless N/A

Electrical Conductivity

Anti-Static

N/A

Weight

3.3lbs

ISO22883

Standard

Advantages at a glance


Rolling Resistance

 \bullet \bullet \bullet \circ \circ


Operating Noise

Floor Surface Preservation $\bullet \bullet \bullet \bullet \circ$

Dimensions

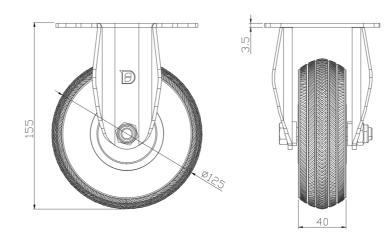

Mounting

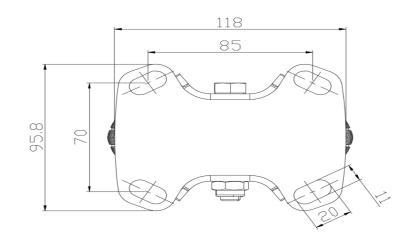

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.