1151D Heavy Duty 1.5" Wide General Purposes Caster Series



PU (red flat) Wheel Diameter × Wheel Width 125 × 40 mm

EAN


YJ-11510500332013

Swivel Caster with Riveted Fork and Stamping Fork with D-shaped hole. Zine-Plated, Fork-mounted Mounting Type. Cast Iron Wheel Center with High Quality Polyurethane tread. Red Cast Iron finish, Bearing with Ball Bearing.

Wheel tread: Made of high-quality polyurethane

Wheel Center: cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 125mm
Wheel Width 40mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 115 x 100mm **Bolt Hole Spacing** 85 x 70mm Plate Hole 20 x 11mm Offset 40mm 208mm Swivel Interference Overall Height 155mm 104mm **Swivel Radius** Hardness Of Tread 93±5° Shore A

Load Capacity (Dynamic) 250kgs

Load Capacity (Static) 375kgs

Temperature -20°C to +70°C
Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 2.14kgs


Standard ISO22883

Advantages at a glance


Rolling Resistance

• • • • • • • • • • • • • • Floor Surface Preservation

Dimensions

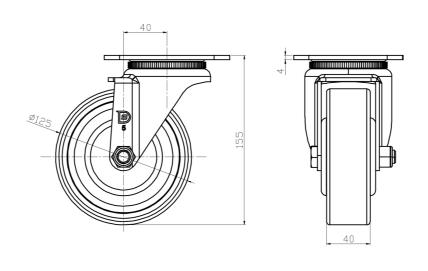

Mounting

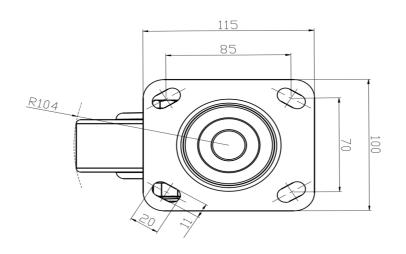

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.