

1151D Heavy Duty 1.5" Wide General Purposes Caster Series



VMRC Wheel Diameter x Wheel Width 150 x 40mm


EAN

YJ-11510500444023

Castors with Total Brake Locking system. Top Plate Riveted Stamping Fork - 85 x 70mm (3-3/8" x 2-3/4") Bolt Hole Spacing Surface Zinc-Plated, Top Plate (4T) Mounting Type device Reinforced Polypropylene and Wheel Tread White, Bearing - Ball Bearing.

Wheel tread: Thermoplastic (PA6)
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

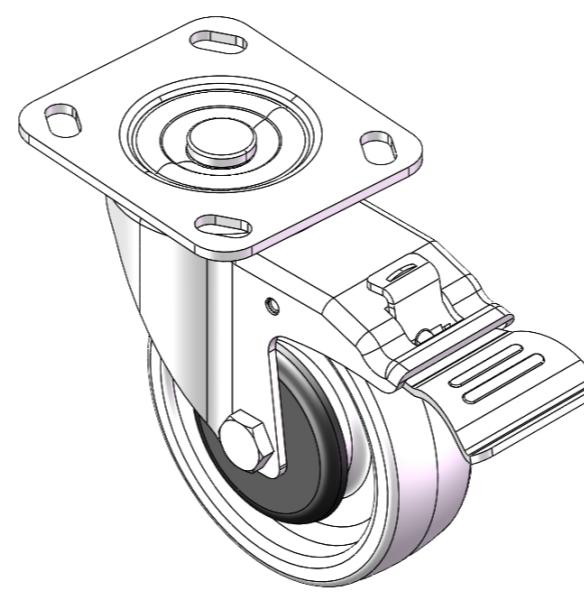

Picture may differ from original product

Technical Data

Imperial Metric

Wheel Diameter

5 "

Wheel Width

1-5/8 "

Wheel Bearing

Wheels With Ball Bearings

Plate Size

4-9/16 " x 4 "

Bolt Hole Spacing

3-3/8 " x 2-3/4 "

Plate Hole

13/16 " x 3/8 "

Offset

1-3/4 "

Swivel Interference

13 "

Overall Height

7-1/2 "

Swivel Radius

6-1/2 "

Hardness Of Tread

72±5° Shore D

Load Capacity (Dynamic)

441lbs

Load Capacity (Static)

661lbs

Temperature

4°F to +140°F

Fork Type

Swivel Caster With Total Brake

Stainless

N/A

Electrical Conductivity

N/A

Anti-Static

N/A

Weight

3.9lbs


Standard

ISO22883


Advantages at a glance

Rolling Resistance ● ● ● ●Operating Noise ● ● ● ○ ○Floor Surface Preservation ● ● ● ○ ○

Dimensions

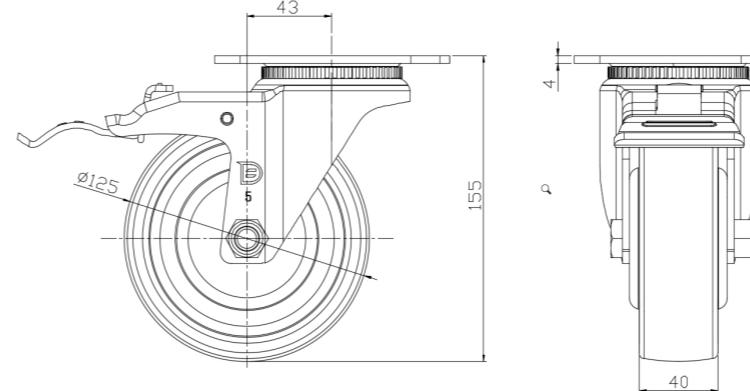

Mounting

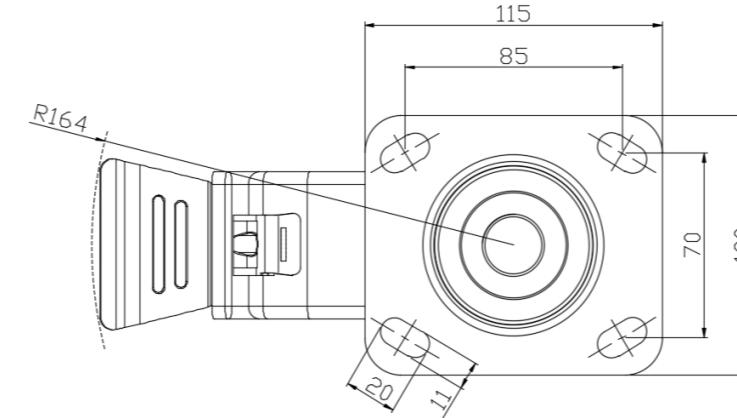

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com