

## 1151D Heavy Duty 1.5" Wide General Purposes Caster Series




W Resolute (black, dark gray) Wheel Diameter x Wheel Width 125 x 38mm

EAN

YJ-11510500451013

Rigid castor, Stamping Fabricated Caster Fork - 85 x 70mm (3-3/8" x 2-3/4") Bolt Hole Spacing Extended control lever surface, Top Plate (3.5T) Mounting Type device Reinforced impact-resistant High-quality Impact Resistance Polypropylene Wheel Center, High-Quality Thermoplastic Rubber (TPR) Wheel Tread Dark gray, Bearing - Ball Bearing.

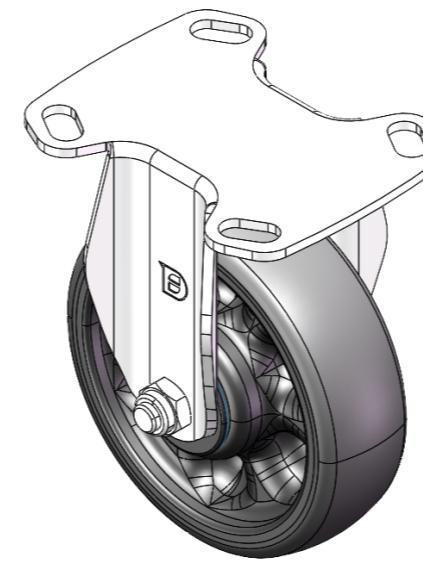

Picture may differ from original product

Wheel tread: Thermoplastic rubber elastomer (TPR)  
Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

## Technical Data


Metric  Imperial

Wheel Diameter	125mm
Wheel Width	38mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	118 x 95.8mm
Bolt Hole Spacing	85 x 70mm
Plate Hole	20 x 11mm
Overall Height	155mm
Hardness Of Tread	72±5° Shore A
Load Capacity (Dynamic)	160kgs
Load Capacity (Static)	240kgs
Temperature	-20°C to +60°C
Fork Type	Rigid Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.91kgs
Standard	ISO22883


## Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • • •
Floor Surface Preservation	• • • •

## Dimensions

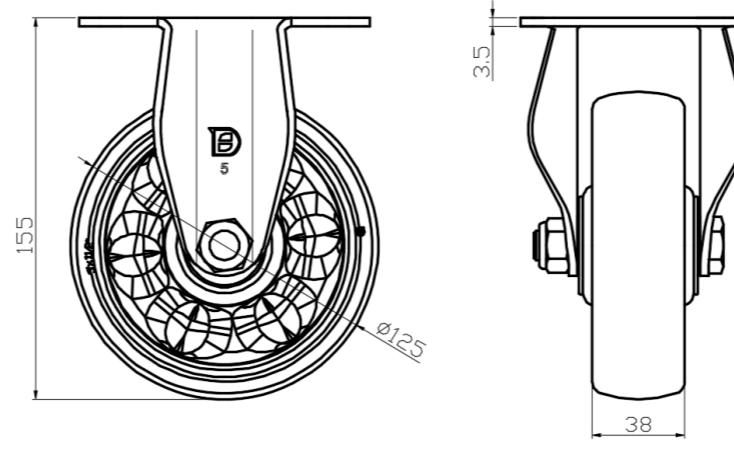

## Mounting

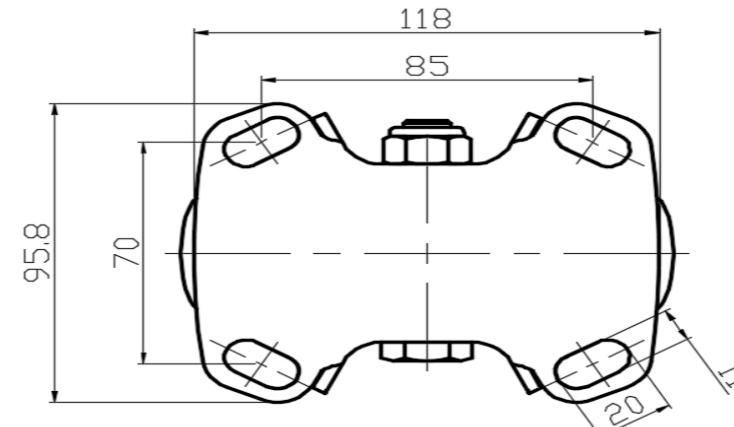

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com