

1151D Heavy Duty 1.5" Wide General Purposes Caster Series



W Resolute (black, dark gray) Wheel Diameter x Wheel Width 125 x 38mm

EAN


YJ-11510500454053

Castors with Total Brake Locking system. Top Plate Riveted Stamping Fork - 85 x 70mm (3-3/8" x 2-3/4") Bolt Hole Spacing Surface plating, Top Plate (4T) Mounting Type Reinforced impact resistant High-quality Impact Resistance Polypropylene Wheel Center, High-Quality Thermoplastic Rubber (TPR) Wheel Tread Dark grey, Bearing - Ball Bearing.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

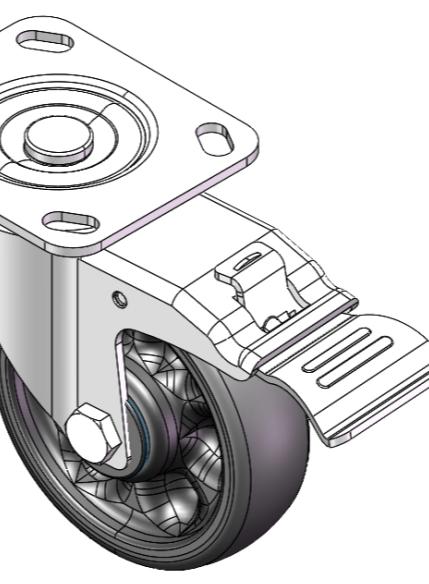

Picture may differ from original product

Technical Data

Metric Imperial

Wheel Diameter 125mm

Wheel Width 38mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 115 x 100mm

Bolt Hole Spacing 85 x 70mm

Plate Hole 20 x 11mm

Offset 43mm

Swivel Interference 328mm

Overall Height 155mm

Swivel Radius 164mm

Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic) 160kgs

Load Capacity (Static) 240kgs

Temperature -20°C to +60°C

Fork Type Swivel Caster With Total Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.58kgs

Standard ISO22883


Advantages at a glance

Rolling Resistance • • • •


Operating Noise • • • •

Floor Surface Preservation • • • •

Dimensions

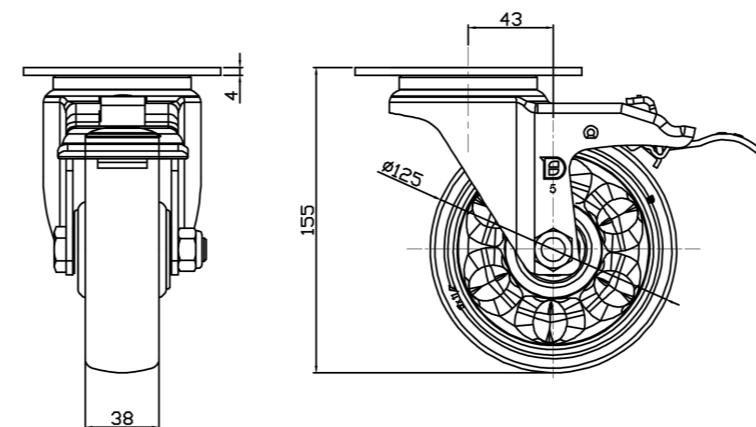

Mounting

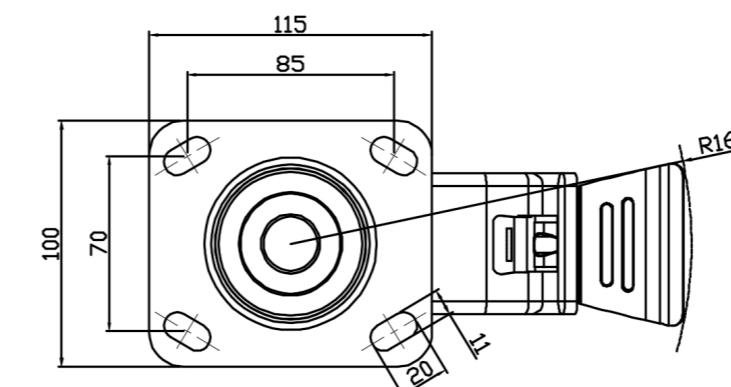

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com