1151D Heavy Duty 1.5" Wide General Purposes Caster Series

Dersheng Casters Keep Rolling

QPU (Brown round) Wheel Diameter × Wheel Width 125 x 40mm

EAN


YJ-11510500531013

Rigid Caster with integral Stamping Fork and 85 x 70mm (3-3/8" x 2-3/4") Bolt Hole Spacing. Zine-Plated, Top Plate (3.5T) Mounting Type system. Cast Iron Wheel Center with High Quality Polyurethane tread. Brown color, Ball Bearing.

Wheel tread: Made of high-quality polyurethane

Wheel Center: cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

Weight

Standard

● Metric ○ Imperial

Wheel Diameter 125mm
Wheel Width 40mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 118 x 95.8mm

Bolt Hole Spacing 85 x 70mm

Plate Hole 20 x 11mm

Overall Height 155mm

Hardness Of Tread 92±5° Shore A

Load Capacity (Static) 525kgs

Temperature -20°C to +70°C

Fork Type Rigid Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

1.27kgs

ISO22883

Hardness Of Tread

92±5° Shore A

Load Capacity (Dynamic)

350kgs

Load Capacity (Static)

525kgs

Temperature

-20°C to +70°


Advantages at a glance


Rolling Resistance

Operating Noise • • • •


Floor Surface Preservation • • • • •

Dimensions





Mounting

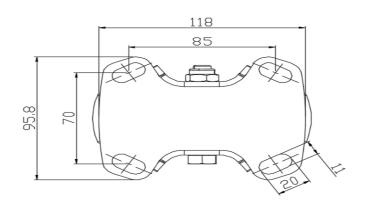

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.