# 1151D Heavy Duty 1.5" Wide General Purposes Caster Series

Dersheng Casters Keep Rolling

QPU (Brown round) Wheel Diameter × Wheel Width 125 x 40mm

EAN

YJ-11510500532063

Swivel Caster with Riveted Fork and Stamping Fork - 85 x 70mm (3-3/8" x 2-3/4") Bolt Hole Spacing Zine-Plated, Fork-mounted (4T) Mounting Type system Cast Iron Wheel Center, High Quality Polyurethane tread Brown, Bearing - Ball Bearing.


4-9/16 " x 4 "

92±5° Shore A

Wheel tread: Made of high-quality polyurethane

Wheel Center: cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

### Technical Data

Plate Size

Hardness Of Tread

● Imperial ○ Metric

Wheel Diameter 5 "

Wheel Width 1-5/8 "

Wheel Bearing Wheels With Ball Bearings

Bolt Hole Spacing 3-7/16 " x 2-13/16 "
Plate Hole 13/16 " x 3/8 "

Plate Hole 13/16 " x 3/8 "

Offset 1-5/8 "

Swivel Interference 8-1/8 "

Overall Height 6-1/8 "

Swivel Radius 4-1/16 "

Load Capacity (Dynamic) 772lbs

Load Capacity (Static) 1157lbs

Temperature -4°F to +158°F
Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 4.6lbs

Standard ISO22883

## Advantages at a glance


Rolling Resistance


• • • • •

Operating Noise


Floor Surface Preservation • • • • •

#### Dimensions





## Mounting

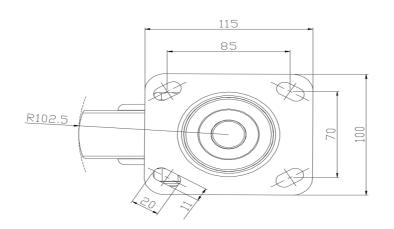

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.