# 1151D Heavy Duty 1.5" Wide General Purposes Caster Series

Dersheng Casters Keep Rolling

QPU (Brown flat) Wheel Diameter × Wheel Width 125 x 40mm

EAN


YJ-11510500534033

Casters with Total Brakes and Locking system. Top Plate Riveted and Stamping 85 x 70mm (3-3/8" x 2-3/4") Bolt Hole Spacing. Zine-Plated, Top Plate (4T) Mounting Type system. Cast Iron Wheel Center with High Quality Polyurethane tread. Brown color, Bearing with Ball Bearing.

Wheel tread: Made of high-quality polyurethane

Wheel Center: cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

### Technical Data

● Imperial ○ Metric

5 " Wheel Diameter

1-5/8 " Wheel Width

Wheel Bearing Wheels With Ball Bearings

4-9/16" x 4" Plate Size Bolt Hole Spacing 3-3/8 " x 2-3/4 " 13/16 " x 3/8 " Plate Hole 1-3/4 " Offset

13 " Swivel Interference Overall Height 6-1/8 " 6-1/2 " **Swivel Radius** Hardness Of Tread 92±5° Shore A

772lbs Load Capacity (Dynamic) Load Capacity (Static) 1157lbs

Temperature -4°F to +158°F

Swivel Caster With Total Brake Fork Type


Stainless N/A **Electrical Conductivity** N/A Anti-Static N/A Weight 5.6lbs Standard ISO22883

### Advantages at a glance


Rolling Resistance Operating Noise

Floor Surface Preservation • • • • •

#### **Dimensions**



## Mounting

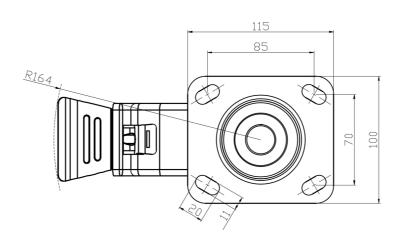

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.